

*SIGGRAPH Asia Course Notes*

**Multiperspective Modeling, Rendering, and Imaging**

Jingyi Yu

University of Delaware

December 2008



## Summary

A perspective image represents the spatial relationships of objects in a scene as they appear from a single viewpoint. In contrast, a multiperspective image combines what is seen from several viewpoints into a single image. In this course, we provide a practical guide on topics in multiperspective modeling and rendering methods and multiperspective imaging systems. We start with a brief review of multiperspective image techniques frequently employed by artists such as the visual paradoxes of Escher, the Cubism of Picasso and Braque, and multiperspective panoramas in cel animations. We then characterize existing multiperspective camera models, with an emphasis on their underlying geometry and image properties. We demonstrate how to use these camera models for creating specific multiperspective rendering effects. Furthermore, we show that many of these cameras satisfy the multiperspective stereo constraints and we demonstrate several multiperspective imaging systems for extracting 3D geometry for computer vision.

## Prerequisites

Many techniques discussed in this course combine methods from computer graphics, computer vision, and computational photography. The audience should have had some prior exposure to camera operation, image processing, and machine vision.

## Intended Audience

The intended audience includes digital artists, photographers, and computer graphics and computer vision researchers using or building multiperspective cameras. They will learn about multiperspective modeling and rendering, along with many real world multiperspective imaging systems.

## Sources

These notes are largely based on the following survey paper:

- J. Yu, L. McMillan, and P. Sturm. State of the Art Report: Multiperspective Rendering, Modeling, and Imaging. In Proceedings of Eurographics 2008, Crete Greece, April 2008.

Supplemental material and presentation slides are also available on the presenter's webpage.

## Speaker Information

Jingyi Yu is an assistant professor at the Department of Computer and Information Sciences at the University of Delaware. He received his B.S. from California Institute of Technology and M.S. and Ph. D. in Electrical Engineering and Computer Science from MIT in 2005. His research interests span a range of topics in computer graphics, computer vision, and image processing, including computational photography, non-conventional optics and camera designs, tracking and surveillance, and graphics hardware.

# Multiperspective Modeling, Rendering, and Imaging

Jingyi Yu<sup>1</sup> Leonard McMillan<sup>2</sup> Peter Sturm<sup>3</sup>

<sup>1</sup>Department of Computer and Information Sciences, University of Delaware, USA

<sup>2</sup>Department of Computer Science, The University of North Carolina at Chapel Hill, USA

<sup>3</sup>INRIA Grenoble – Rhône-Alpes, Montbonnot, France

---

## Abstract

A perspective image represents the spatial relationships of objects in a scene as they appear from a single viewpoint. In contrast, a multiperspective image combines what is seen from several viewpoints into a single image. Despite their incongruity of view, effective multiperspective images are able to preserve spatial coherence and can depict, within a single context, details of a scene that are simultaneously inaccessible from a single view, yet easily interpretable by a viewer. In computer vision, multiperspective images have been used for analyzing structure revealed via motion and generating panoramic images with a wide field-of-view using mirrors.

In this STAR, we provide a practical guide on topics in multiperspective modeling and rendering methods and multiperspective imaging systems. We start with a brief review of multiperspective image techniques frequently employed by artists such as the visual paradoxes of Escher, the Cubism of Picasso and Braque, and multiperspective panoramas in cel animations. We then characterize existing multiperspective camera models, with an emphasis on their underlying geometry and image properties. We demonstrate how to use these camera models for creating specific multiperspective rendering effects. Furthermore, we show that many of these cameras satisfy the multiperspective stereo constraints and we demonstrate several multiperspective imaging systems for extracting 3D geometry for computer vision.

The participants learn about topics in multiperspective modeling and rendering for generating compelling pictures for computer graphics and in multiperspective imaging for extracting 3D geometry for computer vision. We hope to provide enough fundamentals to satisfy the technical specialist without intimidating curious digital artists interested in multiperspective images.

The intended audience includes digital artists, photographers, and computer graphics and computer vision researchers using or building multiperspective cameras. They will learn about multiperspective modeling and rendering, along with many real world multiperspective imaging systems.


---

## 1. Introduction

Camera models are fundamental to the fields of computer vision, computer graphics, and photogrammetry. The classic pinhole and orthographic camera models have long served as the workhorse of 3D imaging applications. However, perspective projection is surprisingly rare in Art: artists, architects, and engineers regularly draw using multiperspective projections. Despite their incongruity of view, effective multiperspective images are still able to preserve spatial coherence. More importantly multiperspective images can depict, within a single context, details of a scene that are simul-

taneously inaccessible from a single view, yet easily interpretable by a viewer.

Historically, multiperspective images have been frequently employed by the pre-Renaissance and post-impressionist artists to depict more than can be seen from any specific point. Classic examples include the visual paradoxes of Escher [Loc81], and the Cubism of Picasso and Matisse [RM84]. Escher uses highly curved projection models to generate "impossible" perspectives of a scene as shown in Figure 1(a). Picasso and other Cubism pioneers made effective of rearranging different parts of the depicted scene while

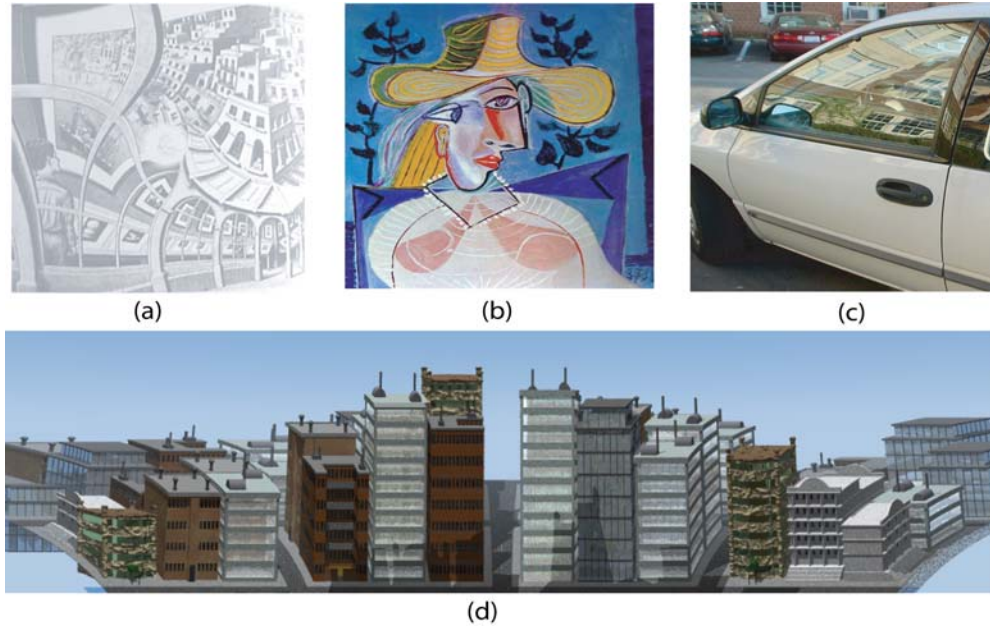

**Figure 1:** *Various Types of Multiperspective Images. (a) Hall City by M.C. Escher. (b) Portrait of a Young Girl by Pablo Picasso. (c) A reflection image observed on the car window. (d) A cross-slit panorama rendered using ray-tracing.*

maintaining their local spatial relationships, which results in an incongruous spatial systems. Despite the large disparities between projections, the overall impression of a three-dimensional space remains intact, as shown in Figure 1(b).

Multiperspective images have also been used as backdrops in cel animation to effectively depict camera motion in a single panorama [TJ95]. In cel animations, a moving foreground element would translate across the background image with no change in parallax. A local camera is attached with the moving foreground element to generate an illusion of motion. In contrast to the foreground elements, backdrop artists often draw by hand a multiperspective projection background to create a deeper, more dynamic environment. Computer generated multiperspective panoramas, as presented by Wood et al. [WFH\*97], combined elements of multiple pinhole cameras into a single image using a semi-automatic image registration process. They relied on optimization techniques, as well as optical flow and blending transitions between views.

Finally, multiperspective images have received attention from the computer vision community for analyzing structure revealed via motion [Sei01, PBP01] and generating panoramic images with a wide field-of-view using mirrors [Nay97]. Several researchers have proposed alternative multiperspective camera models which capture rays from different points in space. These multiperspective cameras include pushbroom cameras [GH97], which collect rays along

parallel planes from points swept along a linear trajectory, and two-slit cameras [Paj02b], which collect all rays passing through two lines. Finally in our everyday lives, we experience multiperspective images when observing reflections of curved surfaces as shown in Figure 1(c).

### 1.1. Perspective Cameras

The concept of a perspective, or pinhole, camera predates modern history. In particular, the model of a camera obscura has been described throughout history and across many cultures. Precise mathematical models of pinhole cameras are fundamental to the fields of photogrammetry, computer vision, and 3D computer graphics.

Geometrically, a pinhole camera collects rays passing through a common 3D point, which is called the Center of Projection (COP). Each pinhole camera, therefore, can be uniquely defined by only 3 parameters (the position of COP in 3D). The image of a pinhole camera requires specifying an image plane for projecting these rays. The image transformation due to the change of the image plane is referred to as an homography.

The pinhole imaging process, thus, can be decomposed into two parts: projecting the scene geometry into rays and mapping the rays onto the image plane. We refer to the first part as *projection* and the second as *collineation*. It has been shown that the projection and collineation can be uniformly

described by the classic  $3 \times 4$  pinhole camera matrix [HZ04], which combines six extrinsic and five intrinsic camera parameters into a single operator that maps homogenous 3D points to a 2D image plane. These mappings are unique up to a scale factor, and the same infrastructure can also be adapted to describe orthographic cameras. Since pinhole cameras capture similar images to those we observe from our eyes, i.e., in human perspectives, pinhole cameras are also called perspective cameras.

The simple pinhole projection model has many nice properties that are useful to computer graphics and computer vision applications. For instance, under perspective projection, all lines in the scene are projected to lines on the image. Similarly, a triangle in 3D space is projected in a triangle on the pinhole image. Thus, by representing the scene geometry using triangles, one can efficiently render the entire scene by projecting the triangles onto the image plane and then rasterizing the triangles in the image space. Furthermore, in light of two-eye human perception, modern computer vision systems use two pinhole cameras to generate binocular stereo. The perspective projection model also induces the so-called epipolar constraints [BBM87], which significantly reduces the search space for establishing the correspondences that determine a point's depth.

## 1.2. Beyond Pinhole Cameras

More general camera models do not need to satisfy the same physical constraints that a perspective camera does, i.e., not all rays collected by the camera need to pass through a common point. Such cameras are often referred to as *multiperspective cameras* or non-central cameras, and the corresponding images are called *multiperspective images*. However, most multiperspective cameras are still expected to satisfy some properties in order to capture meaningful (interpretable) images. A list of these properties include:

- **2D Ray Subspace.** A multiperspective camera, like any camera, collects an image. Typical images, which will be the only ones considered in this paper, are a two dimensional subset of the radiant energy along rays.
- **Continuity.** A multiperspective camera should collect a *smoothly* varying set of rays. This guarantees that continuous objects will project to continuous images. If we further assume that all rays can be embedded as points in some *ray space*, then the first and second criteria indicate that a multiperspective camera captures rays lying on a 2D continuous manifold in this ray space.
- **Unique Projection.** Except singularities (which are discussed in detail later), a multiperspective camera should generally image each 3D point  $P$  at most once, i.e., the camera has at most one ray that passes through  $P$ . In a perspective camera, only the point lying at the COP lies on multiple rays.

## 2. Multiperspective Cameras

In contrast to pinhole and orthographic cameras, which can be uniformly described using the  $3 \times 4$  camera matrix, multiperspective camera models are defined less precisely. In practice, multiperspective camera models are described by constructions. By this we mean that a system or process is described for generating each specific class but there is not always a closed-form expression for the projection transformation.

### 2.1. Classical Multiperspective Cameras


Pushbroom sensors are commonly used in satellite cameras for generating 2-D images of the earth's surface [GH97]. A pushbroom camera consists of an optical system projecting a scene onto a linear array of sensors. The pushbroom sensor is mounted on a moving rail, and as the platform moves, the view plane sweeps out a volume of space and forms a pushbroom image on the sensor as shown in Figure 6(c). In practice, the pushbroom view plane is often replaced by a perspective camera and the pushbroom image is synthesized by assembling the same column of each perspective image as shown in Figure 2(a). "True" pushbroom cameras consisting of a linear CCD of thousands of pixels, are routinely used in satellite imagery.

Another popular class of multiperspective cameras are the cross-slit cameras. A cross-slit camera has two slits  $l_1$  and  $l_2$  that are oblique (neither parallel nor coplanar) in 3D space. The camera collects rays that simultaneously pass through the two slits and projects them onto an image plane, as shown in Figure 6(d). Zomet et al. [ZFPW03] carried out an extensive analysis and modeling of cross-slit cameras. They have shown that a cross-slit camera can be synthesized similar to the pushbroom camera by stitching linearly varying columns across the pinhole viewing cameras, as shown in Figure 2(c).

Pajdla [Paj02a] recently proposed the oblique camera model. The oblique camera is the opposite extremal of the pinhole camera. A pinhole camera collects rays passing through a common point in 3D whereas an oblique camera collects pairwise oblique rays. This means that no two rays in an oblique camera can intersect or be parallel. In order to give a complete description of the rays collected by the oblique camera, Pajdla used transition closure to find all rays. He further used the quadratic ruling surface to determine its epipolar geometry. One special oblique camera is the bilinear camera [YM04a], where any two rays form a non-degenerate bilinear surface, as shown in Figure 6(g).

### 2.2. Catadioptric Cameras

Another class of "real" multiperspective cameras are catadioptric imaging systems that consist of a combination of cameras and mirrors. This is usually done in order to achieve

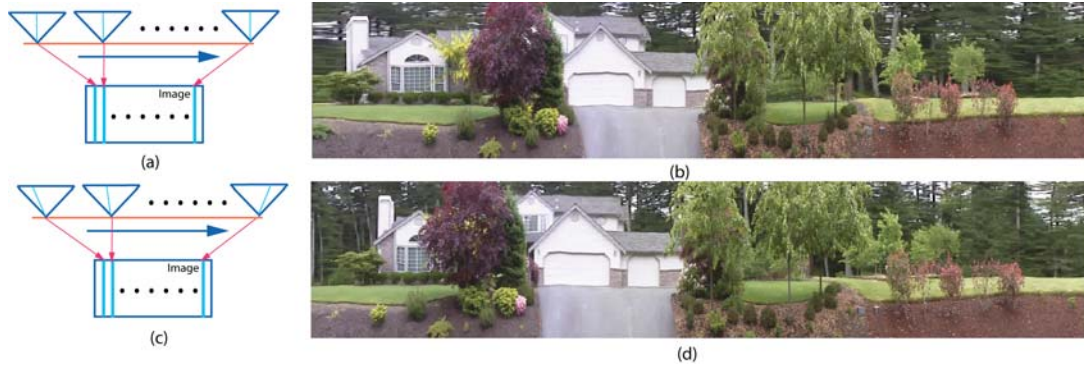

**Figure 2:** *Pushbroom and Cross-slit Camera.* (a) The stationary column sampling routine for synthesizing a pushbroom panorama (b). (c) The linearly varying column sampling routine for synthesizing a cross-slit panorama (d) (courtesy of Steve Seitz).



**Figure 3:** A typical catadioptric image.

a large field of view, e.g. by pointing a pinhole camera at a curved mirror (see a sample image in Figure 3). A large field of view is obviously beneficial for many applications, such as video surveillance, autonomous navigation, obstacle avoidance and of course panoramic image acquisition. Other motivations for using catadioptric systems are to achieve a multiperspective imaging device for IBR, in order to sample the plenoptic function more uniformly than with perspective cameras, or to achieve Taylor-made imaging devices with a camera geometry that is optimized for a given application [SNG04].


Most commonly used catadioptric systems are designed to realize a central projection, i.e. there exists a single point (optical center) through which all projection rays pass. This allows to generate perspective correct images from sections of the acquired image. All possible classes of central catadioptric systems are described in [Nay97, BN99]. The two practical setups consist of a pinhole camera pointed at

a hyperboloidal mirror and an orthographic camera, e.g. realized using a tele-lens, pointed at a paraboloidal mirror. In both cases, the camera must be carefully placed relative to the mirror [Kan00,SGN01]: the camera’s optical center must coincide with one of the mirror’s foci. When this is not the case, then the system becomes a multiperspective one; however if the deviation from the above requirement is small, a central camera model may still be sufficient in many applications.

To model these multiperspective cameras, most previous research has been restricted to simple parametric reflectors such as spherical or conical mirrors [CS97, YKT94], and equiangular mirrors [SDM04]. The *envelope* of the reflected rays, often referred to as the caustic, has been used to characterize multiperspective distortions [SGN01, SGN03]. However, the caustic surface models every ray as originating from a single, but spatially varying, pinhole camera, therefore, it does not provide much insight into the group behavior of neighboring rays.

Yu and McMillan [YM05a] provided an analytical framework to locally model reflections as specific multiperspective cameras. They have shown that local reflections observed by a pinhole or an orthographic camera can be characterized by only four types of multiperspective cameras: cross-slit, pushbroom, pinhole, or orthographic. By mapping a slit to a linear constraint in the 4D ray space, they have further shown that pushbroom, orthographic, and pinhole cameras can all be viewed as special cases of cross-slit cameras: when the two slits intersect, it transforms into a pinhole camera; when one of the slits goes to infinity, the cross-slit transforms into a pushbroom; and when both slits go to infinity, it transforms into an orthographic camera. The imaging properties of these multiperspective cameras explain the complicated visual distortions seen in a reflected image.

Other catadioptric systems are intentionally designed for

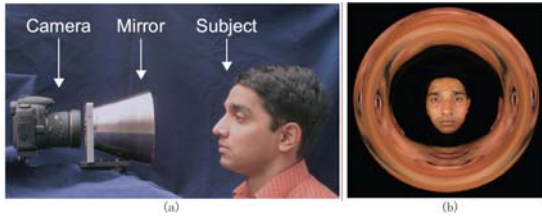

**Figure 4:** A multiperspective image (b) captured by the radial imaging system (a) (Courtesy of Shree Nayar).

multiperspective image acquisition, e.g. systems based on an array of spherical mirrors [LCWT06]. The mirror shape proposed in [HB00] leads to a multiperspective camera that represents a good compromise between size of field of view and non-perspective image distortions. A number of systems for acquiring stereo pairs or sequences with a single camera exist; they typically use two mirrors, a mirror with a double lobe or a mirror and an additional lens [YA06, JKK05, CSH04, FB05, MSEY05]. It has also been shown how to design systems that acquire optically rectified stereo images [GN02].

Recently, Kuthirummal and Nayar [KN06] proposed a radial imaging system that captures the scene from multiple viewpoints within a single image. Their system consists of a conventional camera looking through a hollow rotationally symmetric mirror polished on the inside, as shown in Figure 4. The field of view of the camera is folded inwards and consequently the scene is captured from multiple viewpoints within a single image. By using a single camera, the radiometric properties are the same across all views. Therefore, no synchronization or calibration is required. The radial imaging system can also be viewed as a multiperspective imaging system. It has a circular locus of virtual viewpoints and it has the same epipolar geometry as the cyclographs [Sei01]. By capturing two images by translating the object or the imaging system, one can easily reconstruct the 3D structure of the scene. Other applications include acquiring 3D textures, capturing complete objects, and sampling and estimating BRDFs.

### 2.3. Multi-view Imaging

A closely related area to multiperspective imaging is multi-viewpoint imaging, where the same scene is imaged from different viewpoints. The classical light field cameras [LH96], lumigraphs [GGSC96, BBM\*01], and concentric and panoramic mosaics [PBP01, SKS99] move a single camera to capture multiple views towards the scene object. Levoy et al. [WJV\*05] developed a light field system with multiple synchronized cameras. Conceptually, these methods capture a ray database, or more specifically, a database of radiance measurements along rays, and new views can be

synthesized by querying the ray database. In theory, multiperspective images can also be generated in a similar way [YM04a]. However, since the ray database contains only a finite sampling of the rays, therefore, aliasing can be introduced during initial sampling and final reconstruction.

### 2.4. Multiperspective Photography

Finally, we discuss photographic techniques that have been developed to directly capture multiperspective images.

The Cirkut camera was introduced by Eastman Kodak in the late 1800's to directly capture panoramas, where the camera is rotated about a vertical axis for scanning the scene in front of the camera. The film moves at the same velocity as the scanning camera and eventually constructs an image containing a view of up to 360 degree angle. Davidhazy [Dav87] proposed a peripheral camera to record the surface of cylindrical objects. Instead of rotating the camera, peripheral photography captures all sides of an object by imaging a rotating object through a narrow slit placed in front of a moving film. Seitz [Sei01] proposed a similar cyclograph model by stitching different slices from a sequence of images to provide an inward looking panoramic view of the object.

The crossed-slit anamorphoser, credited to Ducos du Hauron, modifies pinhole camera by replacing the pinhole with a pair of narrow, perpendicularly crossed slits spaced apart along the camera axis. It is a physical realization of the crossed-slit camera [ZFPW03]. The pair of slits working together thus constitutes a multiperspective camera in which the image is stretched or compressed in one direction more than in the other. This type of distortion is called “anamorphic” or “anamorphotic” and the degree of anamorphic compression closely matches the estimated distortions using the crossed-slit model.

The emerging field of computational photography has the potential to benefit multiperspective imaging applications. One important component in computational photography is the generalized optics that treats each optical element as a 4D ray-bender that modifies the rays in a light field [RTM\*06]. The collected ray bundles can then be re-grouped into separate measurements of the Plenoptic function [MB05]. Ng et al. [NLB\*05] developed a hand-held plenoptic camera to record the full 4D light field in a single image. Georgiev et al. [GZC\*06] modified their design to produce higher spatial resolution by trading-off the light field's angular resolution. Veeraraghavan et al. [VRA\*07] used a patterned attenuating mask to encode the light field. By inserting the mask at different location in the optical path of the camera, they achieve dynamic frequency modulation of the light field. Unger et al. [UWH\*03] combined a high-resolution camera and a spherical mirror array to capture the incident light fields with a much wider field-of-view. Since a multiperspective image can be efficiently synthesized by querying the light field (Section 4), all these cameras can be potentially used as a multiperspective camera.

## 2.5. General Linear Cameras

Recently a new camera model has been developed called the General Linear Camera (GLC) [YM04a]. This single model describes typical pinhole and orthographic cameras, as well as many commonly studied multiperspective cameras including pushbroom and cross-slit cameras. GLCs also include many lesser known multiperspective cameras, such as the pencil, twisted orthographic, EPI, and bilinear cameras, shown in Figure 6.

A GLC is defined by three generator rays that originate from three points  $p_1(u_1, v_1)$ ,  $p_2(u_2, v_2)$  and  $p_3(u_3, v_3)$  on an image plane  $\Pi_{image}$ , as is shown in Figure 5. A GLC collects radiance measurements along all possible “affine combinations” of these three rays as defined under a two-plane parametrization (2PP). The 2PP form is commonly used for representing light fields [LH96] and lumigraphs [GGSC96]. Under this parametrization, an affine combination of three rays  $r_i(s_i, t_i, u_i, v_i)$ ,  $i = 1, 2, 3$ , is defined as:

$$r = \alpha(s_1, t_1, u_1, v_1) + \beta(s_2, t_2, u_2, v_2) + (1 - \alpha - \beta)(s_3, t_3, u_3, v_3)$$

This implies that a GLC corresponds to a 2D linear subspace (a 2D hyperplane) in the 4D ray space. In [YM05b], a closed-form mapping is derived to transform a GLC into a hyperplane representation.


The GLC model satisfies the 2D-manifold, the continuity, and the uniqueness criteria for a multiperspective camera. Specifically, GLCs model all 2-dimensional linear subspaces in the 4-dimensional “ray space” imposed by a two-plane parametrization. Moreover, these 2D subspaces of rays are smoothly varying and form continuous images. Finally, for a specific GLC, any general point in 3D space has a unique mapping to a ray in the GLC. This is because under the  $(s, t, u, v)$  parametrization, all rays passing through a 3D point also lie on a 2D hyperplane, and two hyperplanes (one for the point and one for the GLC) generally intersect at a unique point in 4D, as shown by Gu et al. [GGC97]. Therefore, there is only one ray in each GLC that passes through a given point in a scene.

Yu and McMillan [YM04a] proved that most well-known multiperspective cameras, such as pinhole, orthographic, pushbroom, cross-slit, linear oblique cameras are GLCs. They further provided a pair of characteristic equations to determine the GLC type. The first characteristic equation computes whether the three rays will simultaneously pass through a slit in 3D space. It is quadratic and has form:

$$A \cdot \lambda^2 + B \cdot \lambda + C = 0 \quad (1)$$

where

$$A = \begin{vmatrix} s_1 - u_1 & t_1 - v_1 & 1 \\ s_2 - u_2 & t_2 - v_2 & 1 \\ s_3 - u_3 & t_3 - v_3 & 1 \end{vmatrix} \quad C = \begin{vmatrix} u_1 & v_1 & 1 \\ u_2 & v_2 & 1 \\ u_3 & v_3 & 1 \end{vmatrix}$$

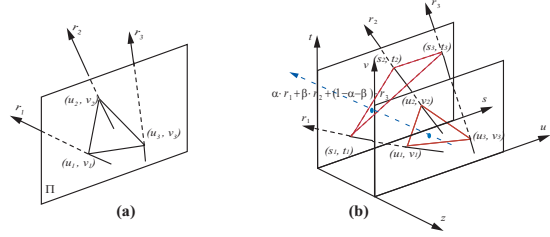

**Figure 5: General Linear Camera Model.** a) A GLC is characterized by three rays originated from the image plane. b) It collects all possible affine combination of three rays.

$$B = \begin{vmatrix} s_1 & v_1 & 1 \\ s_2 & v_2 & 1 \\ s_3 & v_3 & 1 \end{vmatrix} - \begin{vmatrix} t_1 & u_1 & 1 \\ t_2 & u_2 & 1 \\ t_3 & u_3 & 1 \end{vmatrix} - 2 \cdot \begin{vmatrix} u_1 & v_1 & 1 \\ u_2 & v_2 & 1 \\ u_3 & v_3 & 1 \end{vmatrix}$$

A second characteristic equation is the edge parallel condition that checks if all three pairs of the corresponding edges of the  $u-v$  and  $s-t$  triangles formed by the generator rays are parallel.

$$\frac{s_i - s_j}{t_i - t_j} = \frac{u_i - u_j}{v_i - v_j} \quad i, j = 1, 2, 3 \text{ and } i \neq j \quad (2)$$


The number of solutions to the first characteristic equation and the edge parallel condition can be used to determine the type of the general linear camera for a given set of generator rays. Specific cases are given in Table 1 and illustrated in Figure 6.

The GLC model is capable of describing all perspective (pinhole), orthographic, and many multiperspective (including pushbroom and two-slit) cameras, as well as epipolar plane images. It also includes three new and previously unexplored multiperspective linear cameras.

**Twisted Orthographic Camera:** The characteristic equation of the twisted orthographic camera satisfies  $A = 0$ , has no solution, and its generators do not satisfy the *edge-parallel* condition. If  $r_1$ ,  $r_2$  and  $r_3$  are linearly independent, no solution implies  $r_3$  will not intersect the bilinear surface  $S$ . In fact, no two rays intersect in 3D space. In addition,  $A = 0$  also implies that all rays are parallel to some plane  $\Pi$  in 3D space, therefore the rays on each of these parallel planes must have uniform directions as is shown in Fig. 6(f). Therefore, a twisted orthographic camera can be viewed as twisting parallel planes of rays in an orthographic camera along common bilinear sheets.

**Pencil Camera:** The characteristic equation of a pencil camera satisfies  $A \neq 0$ , has one solution and the generators do not satisfy the *edge-parallel* condition. In Fig. 6(e), we illustrate a sample pencil camera: rays lie on a pencil of planes that share line  $l$ . In a pushbroom camera, all rays also pass through a single line. However, pushbroom cameras collect rays along planes transverse to  $l$  whereas the planes of a pen-



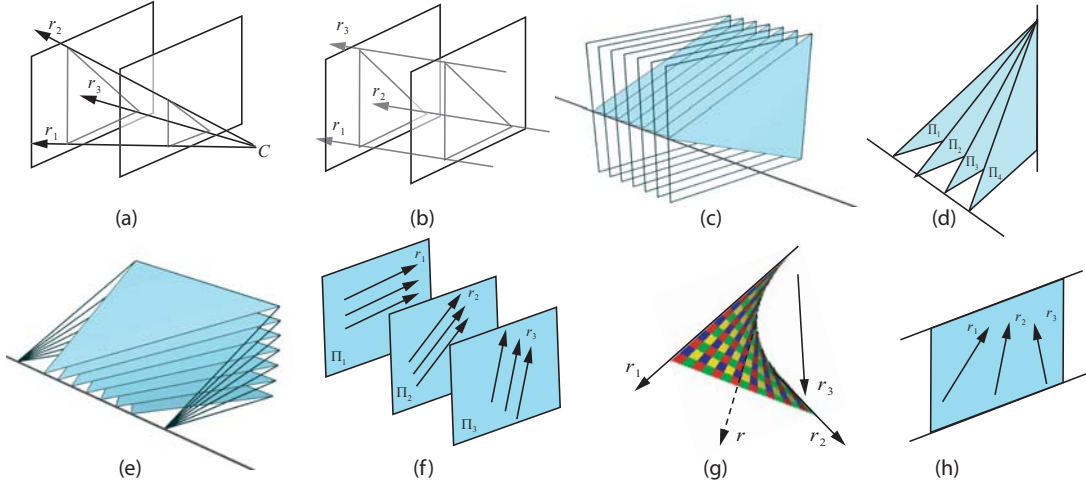

**Figure 6:** *Perspective and Multiperspective Cameras.* (a) In a pinhole camera, all rays pass through a single point. (b) In an orthographic camera, all rays are parallel. (c) In a pushbroom, all rays lie on a set of parallel planes and pass through a line. (d) In a cross slit camera, all rays pass through two non-coplanar lines. (e) In a pencil camera, all coplanar rays originate from a point on a line and lie on a specific plane through the line. (f) In a twisted orthographic camera, all rays lie on parallel twisted planes and no rays intersect. (g) In a bilinear camera, no two rays are coplanar and no two rays intersect. (h) In an EPI camera, all rays lie on a 2D plane. Sample images for these camera models are shown in Figure 9.

**Table 1:** *Characterizing General Linear Cameras by Characteristic Equation*

Characteristic Equation	2 Solutions	1 Solution	0 Solutions	$\infty$ Solutions
$A \neq 0$	XSlit	Pencil/Pinhole <sup>†</sup>	Bilinear	$\emptyset$
$A = 0$	$\emptyset$	Pushbroom	Twisted/Ortho. <sup>†</sup>	EPI

<sup>†</sup>: A GLC satisfying *edge-parallel* condition is pinhole ( $A \neq 0$ ) or orthographic ( $A = 0$ ).

cil camera contain  $l$  (i.e., lie in the pencil of planes through  $l$ ), as is shown in Figures 6(c) and 6(e).

**Bilinear Camera:** By definition, the characteristic equation of a bilinear camera satisfies  $A \neq 0$  and the equation has no solution. Therefore, similar to twisted orthographic cameras, no two rays intersect in 3D in a bilinear camera. In addition, since  $A \neq 0$ , no two rays are parallel either. Therefore, any two rays in a bilinear camera form a non-degenerate bilinear surface, as is shown in Fig. 6(g).

## 2.6. Modeling Arbitrary Multiperspective Cameras

The GLCs can be used to model any multiperspective camera that describes a continuous set of rays such as the catadioptric mirrors and multiperspective panoramas. Specifically, let  $\Sigma(x, y)$  be a continuous 2D ray manifold implicitly parameterized in  $x$  and  $y$ , i.e.,

$$\Sigma(x, y) = [s(x, y), t(x, y), u(x, y), v(x, y)].$$

We can locally approximate the local behavior of the rays by computing the local tangent plane. The tangent plane can be

computed with two spanning vectors  $\vec{d}_1$  and  $\vec{d}_2$ :

$$\vec{d}_1 = [s_x, t_x, u_x, v_x], \vec{d}_2 = [s_y, t_y, u_y, v_y] \quad (3)$$

Recall that every tangent plane corresponds to a GLC, therefore one can choose three points tangent plane,  $\Sigma(x, y)$ ,  $\Sigma(x, y) + \vec{d}_1$ , and  $\Sigma(x, y) + \vec{d}_2$ , and use them to define the GLC. We can then use the GLC characteristic equations to determine the local GLC type. In [YM05a], the local GLC model was used to analyze reflected images seen on arbitrary mirrors. In [YLY07], Yu et al. applied the GLC analysis to approximate the local refraction rays for rendering caustics.

## 2.7. Other Multiperspective Cameras

Glassner [Gla00] described a camera construction called the “putty lenses” for collecting rays along the camera path. In his approach, rays are specified by two surfaces with common parameterizations. Recall that the GLC model uses two parametrization planes to specify the rays, therefore, GLCs can be viewed as special putty lenses.

Hall et al. introduced a simple but versatile camera

model called the Rational Tensor Camera (RTCam) for Non-Photorealistic Rendering [HCS\*07]. The RTCam differs from the GLC model in that an RTCam is described by its projection model (a linear tensor) whereas a GLC is constructed by specifying the three generator rays.

Mei et al. defined an occlusion camera [MPS05] by specifying a variety of geometric terms (focal length, center of interest, etc.) on a pair of planes. Their goal is to use a radially distorted multiperspective camera to capture an omnidirectional view of the target object. The occlusion camera can cover the entire silhouette of an object, and therefore, alleviate disocclusion errors.

### 3. Constructing Multiperspective Images

To construct a desirable multiperspective image, it is a commonplace to combine different multiperspective cameras in a single camera. Examples include multiperspective panoramas, Neo-cubist style renderings, and faux-animations from still-life scenes.


#### 3.1. Construction by a Strip Camera

A commonly used technique for creating multiperspective images is to combine strips from different pinhole cameras. This approach, often called a strip camera, has appeared quite often in Graphics literature. For example, computer generated multiperspective panoramas, as presented by Wood et al. [WFH\*97], combined elements of multiple pinhole strips into a single image using a semi-automatic image registration process. They relied on optimization techniques, as well as optical flow and blending transitions between views. The concentric mosaics of [SKS99] and [PBP01] are another type of multiperspective image that is useful for exploring captured environments.

The MCOP (multiple center of projection) images of Rademacher [RB98] are another example of unstructured multiperspective images. They are closely related to images generated by pushbroom cameras, but they are not constrained to follow linear paths. While these images were intended as scene representations, they are also interesting and informative images on their own.

Durand [Dur02] suggests that specifying multiperspective cameras can also be an interactive process and uses them as an example to distinguish between picture generation and user interaction. Examples of such approaches include the 3D-based interactive rendering systems by Agrawala et al. [AZM00] and Hanson and Wernert [HW98].

Roman et al. [RL06, RGL04] provide a semi-interactive system that uses a linear camera to combine photographs into panoramas of street scenes. Agrawala et al. [AAC\*06] proposed to composite large regions of ordinary perspective images. They reduce the degree of user interaction by identifying the dominant plane and then use graph cuts to minimize multiperspective distortions.

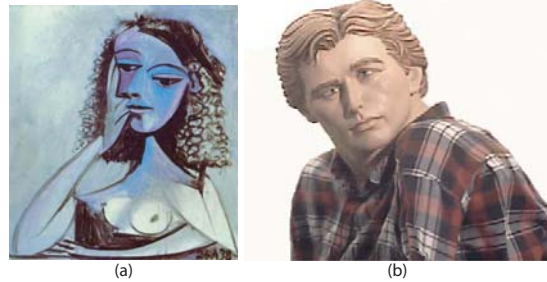

**Figure 7:** (a) Nusch Eluard by Pablo Picasso; (b) A multiperspective image synthesized using the GLC framework [YM04b].

#### 3.2. Construction by GLCs

A different multiperspective image construction method is to use GLCs as primitives. In [YM04b], the problem of multiperspective rendering is treated as one of specifying and sampling a smooth varying set of rays embedded in a 4D space. They used piecewise planar tessellation of a ray manifold corresponding to a specific collection of GLCs, much like a polygonal model of a curved surface. Specifically, they described an arbitrary multiperspective image by a triangulation of the image plane along with generator rays attached to each vertex. The continuity of the manifold guarantees that the images produced are coherent. As the tessellation of the image plane increases, this model can approximate arbitrarily smooth 2D manifolds, and hence render arbitrary multiperspective images.

Since each triangle on the image plane corresponds to a general linear camera, adjacent triangles sharing a common edge represent two GLCs that share two rays. This imposes a constraint on possible pairs of adjacent GLCs. For instance, a pinhole camera cannot share two rays with a different pinhole camera (because rays in two different pinhole cameras pass through two different points). Similarly, a pinhole camera cannot be adjacent to a bilinear camera, because any two rays will intersect in a pinhole while no two rays will intersect in a bilinear camera. In Table 2, we show all possible adjacency relationships between general linear cameras. Triangulations of the image plane into GLCs must satisfy these adjacency constraints in order to assure  $C_0$  continuous images. Furthermore, because any continuous 2D manifold can be locally approximated by tangent planes (i.e., GLCs), the adjacency table shows which types of continuous manifolds, and therefore, multiperspective images, are possible and which are not. For instance, in the table, no two different pinhole cameras can be adjacent to each other. Thus, there does not exist a multiperspective image which looks locally like a pinhole camera everywhere. However, there do exist multiperspective images which look locally like pushbroom or cross-slit images everywhere. In fact, multiper-

**Table 2:** Adjacency Tables of GLCs

Possible Adjacency	P	O	PB	X	PN	T	B
Pinhole (P)	N	N	Y	Y	Y	N	N
Orthographic (O)	N	N	Y	N	N	N	N
Pushbroom (PB)	Y	Y	Y	Y	Y	Y	Y
XSlit (X)	Y	N	Y	Y	Y	Y	Y
Pencil (PN)	Y	N	Y	Y	Y	Y	Y
Twisted Orthographic (T)	N	Y	Y	Y	Y	Y	Y
Bilinear (B)	N	N	Y	Y	Y	Y	Y

spective panoramas for cel animations are good examples of these type of multiperspective images.

While any triangulation of the image plane with generator rays at each vertex describes a multiperspective rendering, it is not a very intuitive specification. In practice, [YM04b] proposed a design system similar to the automatic layout method described by Wood [WFH\*97], but with user guidance. A predefined triangular mesh is placed over the image plane. The user then guides any typical GLC image over the mesh to establish rough spatial relationships. The images can overlap as desired. The mesh then acquires generator rays by extracting rays from the reference images. If more than one image overlaps a vertex various blends of the rays from the reference images can be used, as long as the blend preserves affine combinations. The end result is that corresponding rays are interpolated such that the transition is smooth, as shown in Figure 7.

### 3.3. Applications

Rendering perspectives from multiple viewpoints can be combined in ways other than panoramas. By making subtle changes in viewing direction across the imaging plane it is possible to depict more of scene than could be seen from a single point of view. Such images differ from panoramas in that they are intended to be viewed as a whole. Neo-cubism is an example.

Many of the works of Picasso are examples of such multiperspective images. Figure 7 compares one of Picasso’s paintings with an image synthesized using the GLC framework [YM04b]. Starting from a simple layout, it achieves similar multiperspective effects. In Figures 8(a)-(c), we show the multiperspective view of a teapot by overlaying image pieces from significantly different perspectives. It is possible to show a close to 360 degree view of the teapot, reminiscent of an MCOP image [RB98].

It is also possible to use multiperspective rendering to create fake or faux-animations from still-life scenes. This is particularly useful for animating image based models. In Figures 8(d)-(f), we show three frames from a synthesized animation, each of which corresponds to a multiperspective image rendered from a 3D light field. Zomet [ZFPW03] used

a similar approach by using a single cross-slit camera to achieve rotation effects.

## 4. Rendering Multiperspective Images

Once a multiperspective image is constructed, it can be rendered directly by ray tracing a synthetic scene, stitching the video frames, or cutting through pre-captured light fields.

Agrawala et al. [AAC\*06] combine a series of photographs taken with a hand-held camera from multiple viewpoints along the scene. Their system uses Markov Random Field optimization to construct a composite from arbitrarily shaped regions of the source images according to various properties that the panorama is expected to exhibit.


Alternatively, a multiperspective image can be rendered using ray-tracing. In the GLC framework, each pixel is associated with a unique ray that can be directly traced in a scene. In [DY08], a GLC Ray-Tracer (GLC-RT) was developed based on the legacy Pov-Ray [POV-Ray] framework. The GLC-RT supports rendering both single GLC models and arbitrary multiperspective images constructed from piecewise GLCs.

Although ray-tracing is able to generate high quality multiperspective images, it is too slow for interactive multiperspective rendering. Agrawala et al. [AZM00] proposed to rasterize the scene from a “master camera” and discussed the issue of how to depth-order and composite scene components viewed from different perspectives. In the GLC-based panoramas [YM04b], each GLC at the corresponding triangle on the image plane is rendered by cutting through the pre-captured 3D/4D light fields to achieve real-time performance. However, since collecting all rays present in a scene is impractical or impossible for most light fields, aliasing artifacts due to interpolation may appear in the rendered GLC image pieces where the light field is undersampled.

Recently, real-time multi-perspective rendering techniques have been developed based on polygonal graphics hardware. These include techniques for supporting multiple centers of projection in VR applications [KKYK01, SSP04], rendering general curved reflections or refractions using image sprites [Wym05], and curved polygon rasterization [HWSG06]. The work by Hou et al. [HWSG06] decomposes an arbitrary multiperspective image into piecewise-linear multiperspective primitives similar to the GLC multiperspective rendering approach. They then render each primitive camera by implementing a non-linear beam-tracing using a pair of vertex and fragment programs on programmable graphics hardware.

### 4.1. Distortion, Projection, and Collineation

Although multiperspective rendering provides potentially advantageous images for understanding the structure of observed scenes, they also exhibit multiperspective distortions.

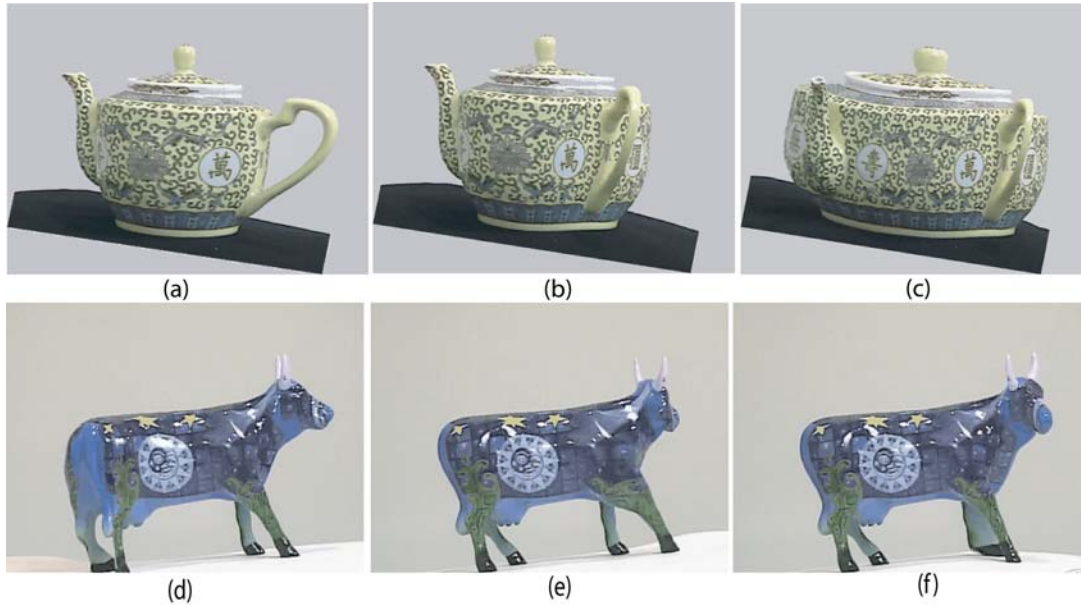

**Figure 8:** (a) A perspective view of a teapot. (b) A synthesized multiperspective image that fuses different perspective views of the handle and beak. (c) An omni-perspective image that shows a 360 degree view of the teapot. (d)-(e) extracted images from a faux-animation generated by [YM04b]. The source images were acquired by rotating a ceramic figure on a turntable. Multiperspective renderings were used to turn the head and hind quarters of the figure in a fake image-based animation.

To analyze these distortions, it is crucial to first derive the closed-form projections and collineations in multiperspective cameras. Unlike perspective cameras whose projection and collineation can be described using the classic  $3 \times 4$  camera matrix [HZ04], multiperspective cameras follow more complicated projection and collineation models.


Gupta and Hartley [GH97] investigated theoretical insights such as the projection and fundamental matrices as well as the epipolar geometry of linear pushbroom cameras. They showed, although the epipolar constraints are totally different from that of a perspective camera, that a matrix analogous to the fundamental matrix of perspective cameras exists for pushbroom cameras. Zomet et al. [ZFPW03] have shown that the projection and collineation of a cross-slit camera is no longer a  $3 \times 4$  projection matrix but a  $3 \times 4 \times 4$  quadratic tensor.

Yu and McMillan [YM05b] used a plane-sweeping algorithm to derive a closed-form solution to projecting 3D points in a scene to rays in a GLC. They concluded that for projection, singularities can only happen in cross-slits, pushbroom, pencil, pinhole, and EPI cameras. When the points lie precisely on the slits, duplicated images will occur, because multiple rays in the GLC will pass through these points. They have also derived a closed-form solution to projecting an arbitrary 3D line into a GLC. They proved that if

a line is parallel to the 2PP, its image will still be a line. If not, its image will be a conic, as shown in Figure 9.

Besides singularities and curving of lines, additional image distortions such as apparent stretching and shrinking, and duplicated projections of a single point [SGN01, YM05a] can appear in a multiperspective image. Zomet et al. [ZFPW03] have shown that, in the case of cross-slit cameras, these distortions can be analyzed in terms of the spatial relationship between the slits and the image plane. Specifically, if one slit is much closer to the image plane than the other, the orientation of the image will be dominated by the corresponding slit [ZFPW03]. Yu and McMillan have shown that the distance between the two slits determines the aspect ratio distortions [YM05a]. For example, when the two slits intersect, the cross-slit transforms into a pinhole camera with small aspect ratio distortion. When one of the slits goes to infinity, the cross-slit transforms into a pushbroom camera with large aspect ratio distortions.

Related to projection, a multiperspective collineation describes the transformation between the images due to changes in sampling and image plane selection. For GLCs, the collineations can be characterized by a quartic (4th order) rational function [YM05b]. The same camera may capture dramatically different images under different collineations, as shown in Figure 10. Yu and McMillan [YM04b] referred to the distortions caused by collineations as *perspective dis-*

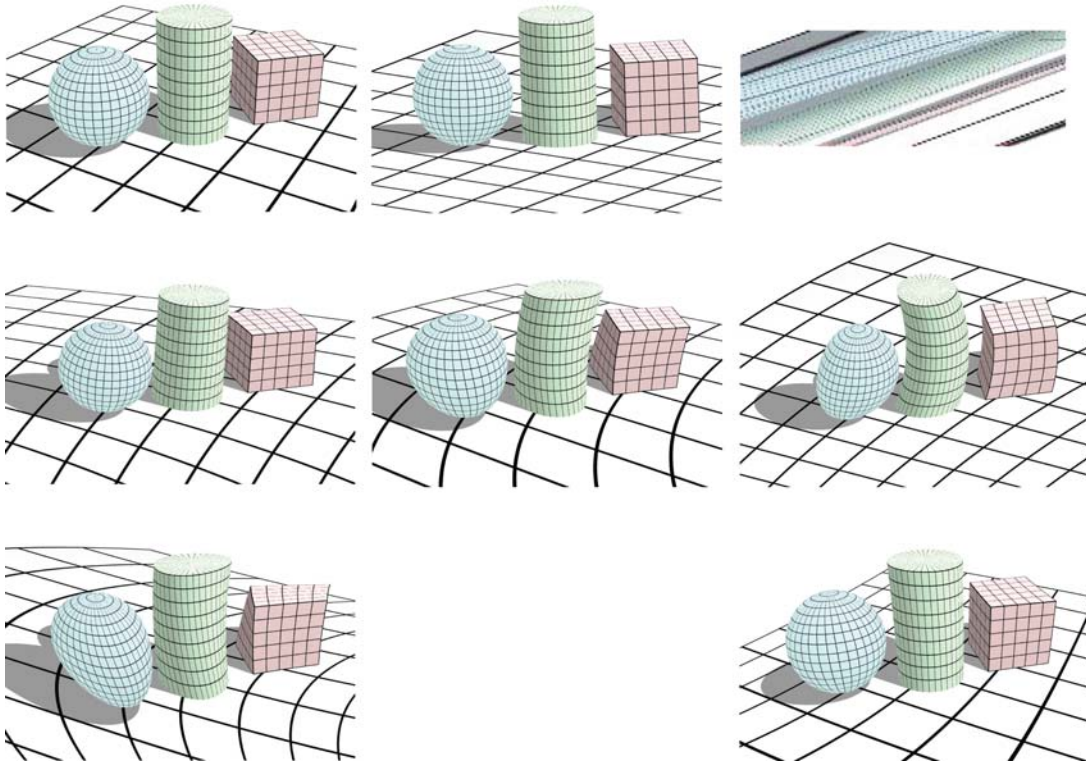


**Figure 9:** Multiperspective images rendered using Pov-Ray. From left to right, top row: a pinhole, an orthographic and an EPI; middle row: a pushbroom, a pencil and a twisted orthographic; bottom row: a bilinear and a cross-slit.


tion, whereas distortions introduced by smooth changes in the center of projection as *projective distortion*. Projective distortions are inherent to the geometry structure of the camera and are usually desirable to render specific multiperspective effects such as the Neo-Cubism style by Picasso.

#### 4.2. Reducing Multiperspective Distortions

A major component in multiperspective rendering is to reduce perspective distortions in order to smooth the transitions of projective distortion. In computer vision, image-warping has been commonly used to reduce perspective distortions. Image-warping computes an explicit pixel-to-pixel mapping to warp the original image onto a nearly perspective image. For cameras that roughly maintain a single viewpoint [Nay97], simple parametric functions are sufficient to eliminate perspective, radial, and tangential distortions [Che95,DK00]. However, for complex imaging systems, especially those exhibiting severe caustic distortions [SGN01], the warping function is difficult to model and may not have a closed-form solution.

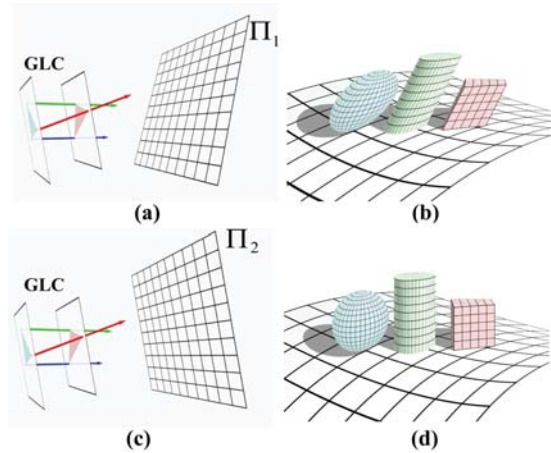

**Figure 10:** The image (d) of a cross-slit GLC under collineation (c) appears much less distorted than the image (b) of the same camera under collineation (a).

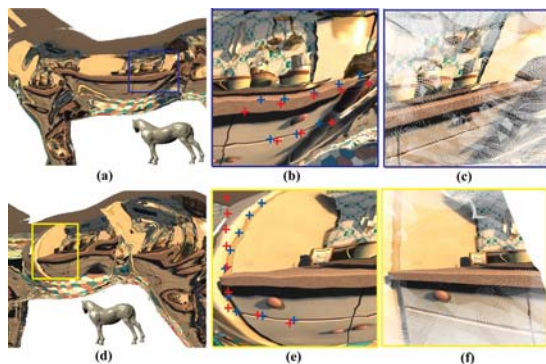

**Figure 11:** *Correcting complex distortions on a horse model. We render a reflective horse model under two different poses (a) and (d) and then select regions (b) and (e). (c) and (f) are the resulting images by matching the selected features (blue) and target pixels (red) in (b) and (e) using collineations.*

Image-based rendering algorithms have also been proposed to reduce perspective distortions [SKS99, GGSC96]. There, the focus has been to estimate the scene structure from a single or multiple images. Zorin and Barr [ZB95] studied the use of multiperspective and other geometric distortions to improve perceptual qualities of images. Swaminathan and Nayar [SGN03] have shown that simple geometry proxies, such as the plane, sphere, and cylinder, are often sufficient to reduce caustic distortions in catadioptric images, provided that a prior on scene structure is known. The geometry proxies have also been used to construct close-to-perspective panoramas [AAC\*06, RL06], where the scene geometry is approximated to align the image plane.

Ding and Yu [DY07b] recently proposed a third approach based on multiperspective collineations. They have developed an interactive system that allows users to select feature rays from the multiperspective image and position them at the desired pixels. They then compute the optimal collineation to match the projections of the feature rays with the corresponding pixels. Their method can robustly correct highly complex distortions without acquiring the scene geometry, as shown in Figure 11.

## 5. Multiperspective Geometry

In this section, we focus on analyzing the camera geometry of multiperspective cameras, with an emphasis on how to use these cameras in structure-from-motion. Key concepts of structure-from-motion are camera calibration, epipolar geometry, motion and pose estimation, and 3D reconstruction. These are well understood and formulated for perspective and other central cameras. However classical results such as the fundamental matrix representing stereo or epipolar geometry, are not directly applicable for general multiperspective cameras, not even for general central ones. We first de-

scribe an abstract unified camera model that allows to handle any multiperspective system and explain how calibration and other structure-from-motion problems can be tackled using that model.

We then consider the special cases where multiperspective camera pairs have a standard stereo geometry, i.e. corresponding points lie on the same scan line in both images; this simplifies image matching and 3D reconstruction. Finally, we present recent work on multiperspective image pairs that are close to standard stereo geometry, which thus allows to handle larger classes of cameras.

### 5.1. Camera Model

Classical camera models provide an analytical *projection function*, allowing to compute the image point where a 3D point is projected to. Usual models depend on up to ten or twenty intrinsic camera parameters, such as the focal length for perspective cameras. Most of these models are applicable to a restricted class of camera technologies each, e.g. perspective cameras, possibly with radial distortion, catadioptric cameras, fish-eyes, pushbroom sensors etc. For most models there does not seem to exist an analytical epipolar geometry, i.e. an equivalent object to the perspective fundamental matrix, that constrains point matches between two images via a bilinear constraint. Slight exceptions are a special case of catadioptric cameras (central catadioptric cameras with a parabolic mirror), for which a fundamental matrix of size  $6 \times 6$  exists [Stu02], and linear pushbroom cameras which have a  $4 \times 4$  fundamental matrix [GH97].

As will be shown below, these difficulties vanish if instead of reasoning in terms of matching image points, we consider the matching of projection rays. To this end, let us consider a generic camera model, as follows. A camera is modeled by the set of its projection rays, i.e. the lines in 3D such that light incoming along any of them, ends up on the image sensors. We make the assumption that to each point in the image, a single projection ray is associated. This is obviously not the case with real cameras (due to e.g. blur), but is an assumption made by most geometrical camera models. Most importantly, we do not impose the existence of an analytical relation between the coordinates of a projection ray and the coordinates of the associated image point. Further, for multiperspective cameras, the projection rays do not have a single common intersection point, as opposed to central cameras.

Calibration of this camera model amounts to determining, for each image point (rather, a finite sample of image points, e.g. all pixel centers), the associated projection ray. In the following, we briefly describe a calibration approach and then how to perform structure-from-motion for cameras calibrated under that model.

## 5.2. Calibration

We briefly review a generic calibration approach developed in [SR04], an extension of [CLSC92, GTK88, GN05], to calibrate different camera systems, especially multiperspective ones. As mentioned, calibration consists in determining, for every pixel, the projection ray associated with it. In [GN05], this is done as follows: two images of a calibration object with known structure are taken. We suppose that for every pixel, we can determine the point on the calibration object, that is seen by that pixel. For each pixel in the image, we thus obtain two 3D points. Their coordinates are usually only known in a coordinate frame attached to the calibration object; however, if one knows the motion between the two object positions, one can align the coordinate frames. Then, every pixel's projection ray can be computed by simply joining the two observed 3D points.

In [SR04] a more general approach is proposed, that does not require knowledge of the calibration object's displacement. In that case, three images need to be taken at least. The fact that all 3D points observed by the same pixel in different views, are on a line in 3D (the pixel's projection ray), gives a constraint that allows to recover both the motion and the camera's calibration. The constraint is formulated via a set of trifocal tensors, that can be estimated linearly, and from which motion, and then calibration, can be extracted. In [SR04], this approach is first formulated for the use of 3D calibration objects, and for the general imaging model, i.e. for multiperspective cameras. We also propose variants of the approach, that may be important in practice: first, due to the usefulness of planar calibration patterns, we specialized the approach appropriately. Second, we propose a variant that works specifically for central cameras (pinhole, central catadioptric, or any other central camera). More details are given in [SR03].

An important part of this calibration procedure is the matching between images and calibration grids, especially since matches for all pixels are required. A practical way for doing this is to use a structured-light type approach, as in [TS05]: the calibration grid is replaced by a flat computer screen. For each camera position, a series of black-and-white patterns is displayed such that each screen pixel has a unique sequence of blacks and whites. Matching then basically amounts to determining, for each pixel in the image, its sequence of blacks and whites, giving directly the corresponding point in the "calibration screen".

## 5.3. Structure-from-Motion

Once cameras are calibrated, structure-from-motion can be performed for any type of multiperspective settings using the same algorithms. We briefly describe how three of the basic structure-from-motion problems – pose and motion estimation as well as 3D reconstruction – can be solved.

### 5.3.1. Pose Estimation

A first example is pose estimation, i.e. the problem of computing the relative position and orientation between an object of *known* structure, and a calibrated camera. A literature review on algorithms for perspective cameras is given in [HLON94]. Here, we briefly show how the minimal case can be solved for general cameras [CC04, Nis04a, RLS06]. For perspective cameras, pose can be estimated, up to a finite number of solutions, from 3 point correspondences (3D-2D) already. The same holds for general cameras. Consider 3 image points and the associated projection rays, computed using the calibration information. We parameterize generic points on the rays as follows:  $\mathbf{A}_i + \lambda_i \mathbf{B}_i$ . If we are able to estimate the position of the 3 object points, i.e. the  $\lambda_i$ , then the pose problem is solved: the position of 3 points in general position define the complete position and orientation of an object.

We know the structure of the observed object, meaning that we know the mutual distances  $d_{ij}$  between the 3D points. We can thus write equations on the unknowns  $\lambda_i$ :

$$\|\mathbf{A}_i + \lambda_i \mathbf{B}_i - \mathbf{A}_j - \lambda_j \mathbf{B}_j\|^2 = d_{ij}^2$$

This gives a total of 3 quadratic equations in 3 unknowns. Many methods exist for solving this problem, e.g. symbolic computation packages such as MAPLE allow to compute a resultant polynomial of degree 8 in a single unknown, that can be numerically solved using any root finding method.

Like for perspective cameras, there are up to 8 theoretical solutions. For perspective cameras, at least 4 of them can be eliminated because they would correspond to points lying behind the camera [HLON94]. As for general cameras, determining the maximum number of feasible solutions requires further investigation. In any case, a unique solution can be obtained using one or two additional points [HLON94].

### 5.3.2. Motion Estimation and Epipolar Geometry

We describe how to estimate ego-motion, or, more generally, relative position and orientation of two calibrated general cameras. This is done via a generalization of the classical motion estimation problem for perspective cameras and its associated centerpiece, the essential matrix [Lon81]. We briefly summarize how the classical problem is usually solved [HZ04]. Let  $\mathbf{R}$  be the rotation matrix and  $\mathbf{t}$  the translation vector describing the motion. The essential matrix is defined as  $\mathbf{E} = -[\mathbf{t}]_{\times} \mathbf{R}$ . It can be estimated using point correspondences  $(\mathbf{x}_1, \mathbf{x}_2)$  across two views, using the epipolar constraint  $\mathbf{x}_2^T \mathbf{E} \mathbf{x}_1 = 0$ . This can be done linearly using 8 correspondences or more. In the minimal case of 5 correspondences, an efficient non-linear algorithm, which gives exactly the theoretical maximum of 10 feasible solutions, was only recently introduced [Nis04b]. Once the essential matrix is estimated, the motion parameters  $\mathbf{R}$  and  $\mathbf{t}$  can be extracted relatively straightforwardly [Nis04b].

In the case of our general imaging model, motion estimation is performed similarly, using pixel correspondences  $(\mathbf{x}_1, \mathbf{x}_2)$ . Using the calibration information, the associated projection rays can be computed. Let them be represented by their Plücker coordinates, i.e. 6-vectors  $\mathbf{L}_1$  and  $\mathbf{L}_2$ . The epipolar constraint extends naturally to rays, and manifests itself by a  $6 \times 6$  essential matrix, introduced by Pless [Ple03]:

$$\mathbf{E} = \begin{pmatrix} -[\mathbf{t}]_{\times} \mathbf{R} & \mathbf{R} \\ \mathbf{R} & 0 \end{pmatrix}$$

The epipolar constraint then writes:  $\mathbf{L}_2^T \mathbf{E} \mathbf{L}_1 = 0$  [Ple03]. Once  $\mathbf{E}$  is estimated, motion can again be extracted straightforwardly (e.g.,  $\mathbf{R}$  can simply be read off  $\mathbf{E}$ ). Linear estimation of  $\mathbf{E}$  requires 17 correspondences.

There is an important difference between motion estimation for central and multiperspective cameras: with central cameras, the translation component can only be recovered up to scale. Multiperspective ones however, allow to determine even the translation's scale (although this is likely to be inaccurate in practice). This is because a single calibrated multiperspective camera already carries scale information, via the distance between mutually oblique projection rays. One consequence is that the theoretical minimum number of required correspondences is 6 instead of 5.

### 5.3.3. 3D Point Triangulation

We now describe an algorithm for 3D reconstruction from two or more calibrated images with known relative position. Let  $\mathbf{C} = (X, Y, Z)^T$  be a 3D point that is to be reconstructed, based on its projections in  $n$  images. Using calibration information, we can compute the  $n$  associated projection rays. Here, we represent the  $i$ th ray using a starting point  $\mathbf{A}_i$  and the direction, represented by a unit vector  $\mathbf{B}_i$ . We apply the mid-point method [HS97, Ple03], i.e. determine  $\mathbf{C}$  that is closest in average to the  $n$  rays. Let us represent generic points on rays using position parameters  $\lambda_i$ . Then,  $\mathbf{C}$  is determined by minimizing the following expression over  $X, Y, Z$  and the  $\lambda_i$ :  $\sum_{i=1}^n \|\mathbf{A}_i + \lambda_i \mathbf{B}_i - \mathbf{C}\|^2$ . This is a linear least squares problem, which can be solved e.g. via the Pseudo-Inverse. The solution can actually be obtained in closed-form [RLS06].

### 5.3.4. Multi-View Geometry

One concern of multi-view geometry is to study constraints on the positions of matching points in two or more images. With the generic camera model we consider in this section, this translates into matching constraints on projection rays in 3D. In paragraph 5.3.2, we already described the associated epipolar constraint, i.e. the matching constraint for a pair of images, and its algebraic representation, the essential matrix. Like for perspective cameras, this can be extended to the case of three or four images. Matching constraints are

then represented by so-called matching tensors, which constrain corresponding projection rays via multi-linear equations. This issue is too technical for this review; the interested reader is referred to [Stu05].

## 5.4. Multiperspective Stereo

In the previous section, we considered structure-from-motion concepts in terms of projection rays of cameras, making abstraction of the actual images. Let us go back now to images and pixels and re-consider the epipolar geometry between two images. The central question of epipolar geometry is: given a point in one image, what is the locus of the corresponding point in the other image, and how can one compute it? A general answer goes as follows. Consider the projection ray associated with the given point in the first image and determine all projection rays of the second camera that intersect it. Then, the image points associated with these rays, form the locus of the corresponding point in the second image. For perspective cameras, the locus is known to be a line (actually, a line segment), but for more general camera geometries, especially multiperspective ones, the locus is usually a more complicated curve and may even be simply a set of isolated points. For example, with central catadioptric cameras with parabolic mirrors, the locus is a conic.

For efficient automatic image matching, it is favorable to have an epipolar geometry where these loci are lines, as with perspective images. This is one of the motivations of the works on multiperspective stereo theory by Seitz and Pajdla [Sei01, Paj02b]. They provide a complete classification of all possible multiperspective image pairs in standard stereo configuration, i.e. where corresponding points lie on the same scan line in both images. Their work suggests that only three varieties of epipolar geometry exist: planes, hyperboloids, and hyperbolic-paraboloids, all corresponding to double ruled surfaces. The notion of epipolar geometry is thus generalized to apply to multiperspective images and a unified representation is used to model all classes of stereo views, based on the concept of a quadric view. The multiperspective stereo theory can be applied to derive new types of stereo image representations with unusual and useful properties.

## 5.5. Epsilon-Stereo Pairs

Finally, Ding and Yu [DY07a] recently proposed a method for fusing multiperspective camera pairs that do not have a standard stereo geometry in the sense explained in the previous paragraph. Such pairs may consist of two different cross-slit cameras, a cross-slit and a pushbroom, or two arbitrary multiperspective cameras. They introduced a notion of *epsilon-stereo pairs*. An epsilon stereo pair consists of two images with a slight vertical parallax. They have shown that many multiperspective camera pairs which do not satisfy the stereo constraint can still form epsilon stereo



pairs. They have also introduced a new ray-space warping algorithm to minimize stereo inconsistencies in an epsilon pair using multiperspective collineations. This makes epsilon stereo model a promising tool for synthesizing close-to-stereo fusions from many non-stereo pairs.

## 6. Future Direction

There are several directions for future research.

### 6.1. Multiperspective Rendering Hardware

Most multiperspective rendering results presented in this report are either ray-traced or synthesized from precaptured light fields or videos. Ray-tracing is usually used as an off-line tool for generating high quality multiperspective images. Light fields can be directly used to render multiperspective images at an interactive rate. However, the rendering quality relies heavily on the sampling density and the image resolution of the light field.

Ideally, graphics hardware can be used for interactive multiperspective rendering. The key component in the polygonal graphics pipeline is projecting and rasterizing triangles in the camera. For a multiperspective camera (e.g., a GLC), the projection of any 3D point (triangle vertices) to the camera may have a closed-form solution and can be easily mapped onto the vertex shader [HWSG06]. However, rasterizing the triangle from the projected vertices in a multiperspective camera is a challenging problem. For example, a line segment in general projects to a conic in a GLC. Therefore, the rasterizer needs to non-linearly interpolate between the two projected vertices, which cannot be easily achieved on classical polygon-based graphics hardware.

One possible solution is to subdivide scene geometry into smaller triangles so that their images on the multiperspective camera can also be approximated as triangles [AL07]. However, it is unclear how to control the subdivision level and the computational overhead scales with the number of vertices and triangles in the model. Hou et al. [HWSG06] combined the multiperspective projection and non-linear beam-tracing on the GPUs to approximate a multiperspective image. However, their method needs to compute the bounding region of rays to reduce the overhead in beam-tracing.

In the future, special graphics hardware may be developed to directly render multiperspective images. Specifically, it is desirable to make the rasterization unit also programmable to support multiperspective cameras. Notice that any multiperspective camera can be locally approximated by the GLCs. Therefore, if the rasterization unit can support the GLC projection and collineation (i.e., 4th order rational functions), it may be used to render arbitrary multiperspective effects.

A possible extension to the method by Hou et al.

[HWSG06] is to develop a multiperspective culling algorithm similar to the ones developed for a perspective camera. The difficulty lies in that the viewing frustum of a multiperspective does not form a convex polygon (e.g., it is a bilinear volume for the bilinear GLC). Efficient algorithms may be developed to approximate the multiperspective frustums as convex frustums.

An interactive multiperspective renderer will benefit many applications such as interactive design of multiperspective panoramas and image-based animations. It can also be used to render accurate reflections and refractions. For instance, one can approximate local reflections and refractions in terms of piecewise GLCs and then render individual GLCs using the multiperspective renderer.

### 6.2. Multiperspective Acquisition

Multiperspective cameras could also be used to design new acquisition devices for many IBR and computational photography applications. For example, it will be interesting to design specially curved mirrors to efficiently capture the light fields. The classical pinhole camera arrays is one way to sample the ray space: each pinhole camera corresponds to a 2D hyperplane in the 4D ray space. Alternatively, it is possible to use special-shaped mirrors to more efficiently sample the ray space via a different set of 2D subspaces (e.g., using the GLCs). In addition, it is possible to develop multiperspective IBR techniques to trade-off the image resolution for the spatial resolution. This will effectively reduce the aliasing artifacts in light field rendering due to spatial undersampling.

The multiperspective acquisition system can also be used to capture appearance data. The spherical mirror array system proposed by Unger et al. [UWH\*03] has relatively large multiperspective distortion due to the geometry of the mirrors. It is possible to design special-shaped mirror arrays that produce less distortion while maintaining a wide field-of-view. It is also possible to decompose the mirror surfaces into piecewise GLCs and use the multiperspective calibration techniques to calibrate the entire mirror array.

Furthermore, we can generate a multiperspective light source by replacing the viewing camera in a catadioptric camera with a point light source. Many image-based relighting approaches are restricted by the geometric constraints of the light source, and by designing a different type of lighting condition, it is possible to improve the way for effectively measuring and sampling the radiance off the surface and, therefore, benefit applications such as measuring the surface BRDF.

A multiperspective light source will cast special-shaped shadows. In particular, the shadow of a 3D line segment can be a curve under a multiperspective light source. This may lead to the development of new shape-from-shadow algo-

rithms which determine the depth of the object by analyzing the shape of the shadow at the silhouettes.

### 6.3. Computational and Differential Ray Geometry

Finally, it is possible to develop a new theoretical framework based on multiperspective geometry to characterize and catalog the structures of ray space. For example, it can be highly useful to model the algebraic ray subspaces (e.g., ray simplices) and analyze how ray geometries are related to specific multiperspective cameras and affect visual phenomena such as shading and distortion.

In addition, the high-dimensional ray space such as the light fields are typically too large for in-core processing. Therefore, it will be beneficial to develop a ray-space triangulation algorithm using Constrained Delaunay Triangulation and geometric transformation operators to effectively approximate, interpolate, and simplify the ray data. Notice that since a multiperspective camera correspond to a 2D manifold in the 4D ray space, each geometric operator has a unique effect to transform one multiperspective camera to another.

It will also be useful to relate multiperspective reflection and refraction distortions to the geometric attributes of the reflector/refractor surface. One possible approach is to model the local reflections or refractions in terms of specific multiperspective cameras and then derive the surface differential geometry from the camera intrinsics. If we further use the multiperspective distortions to determine the multiperspective camera type, we can develop new shape-from-distortion methods for recovering the geometry of specular surfaces, a challenging problem in computer vision for decades [IKM\*08].

### References

- [AAC\*06] AGARWALA A., AGRAWALA M., COHEN M., SALESIN D., SZELISKI R.: Photographing long scenes with multi-viewpoint panoramas. *ACM Transactions on Graphics (Proceedings of SIGGRAPH 2006)*, 853–861.
- [AL07] ADAMS A., LEVOY M.: General Linear Cameras with Finite Aperture. In *Proc. Eurographics Symposium on Rendering* (2007).
- [AZM00] AGRAWALA M., ZORIN D., MUNZNER T.: Artistic multiprojection rendering. In *Proc. Eurographics Rendering Workshop* (2000), 125–136.
- [BBM87] BOLLES R.C., BAKER H.H., MARIMONT D.H.: Epipolar-Plane Image Analysis: An Approach to Determining Structure from Motion. *International Journal of Computer Vision* 1, 1 (1987), 7–56.
- [BBM\*01] BUEHLER C., BOSSE M., MCMILLAN L., GORTLER S., COHEN M.: Unstructured Lumigraph Rendering. In *Proc. of ACM SIGGRAPH* (2001), 425–432.
- [BN99] BAKER S., NAYAR S.K.: A Theory of Single-Viewpoint Catadioptric Image Formation. *International Journal on Computer Vision*, 35, 2 (1999), 1–22.
- [CC04] CHEN C.-S., CHANG W.-Y.: On Pose Recovery for Generalized Visual Sensors. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 26, 7 (2004), 848–861.
- [Che95] CHEN S.E.: QuickTime VR – An Image-Based Approach to Virtual Environment Navigation. *Computer Graphics*, 29 (1995), 29–38.
- [CLSC92] CHAMPLEBOUX G., LAVALLÉE S., SAUTOT P., CINQUIN P.: Accurate Calibration of Cameras and Range Imaging Sensors: the NPBS Method. In *Proc. International Conference on Robotics and Automation* (1992), 1552–1558.
- [CS97] CHAHL J., SRINIVASAN M.: Reflective Surfaces for Panoramic Imaging. *Applied Optics* 36, 31 (1997), 8275–8285.
- [CSH04] CABRAL E., SOUZA J., HUNOID C.: Omnidirectional Stereo Vision with a Hyperbolic Double Lobed Mirror. In *Proc. International Conference on Pattern Recognition* (2004), 1–4.
- [Dav87] DAVIDHAZY A.: Peripheral Photography: Shooting full circle. *Industrial Photography* 36 (1987), 28–31.
- [DK00] DERRIEN S., KONOLIGE K.: Approximating a single viewpoint in panoramic imaging devices. In *Proc. International Conference on Robotics and Automation* (2000), 3932–3939.
- [DY07a] DING Y., YU J.: Epsilon Stereo Pairs. In *Proc. British Machine Vision Conference* 1 (2007), 162–171.
- [DY07b] DING Y., YU J.: Multiperspective Distortion Correction Using Collineations. In *Proc. Asian Conference on Computer Vision* 1 (2007), 95–105.
- [DY08] DING Y., YU J.: GLC-RT: A Multiperspective Ray Tracer Based on General Linear Cameras. Technical Report, University of Delaware, 2008.
- [Dur02] DURAND F.: An invitation to discuss computer depiction. In *Proc. Symposium on Non-Photorealistic Animation and Rendering (NPAR)* (2002), 111–124.
- [Dvo16] Nick Dvoracek’s kind hosting of an article from Scientific American, "The Slit Camera, February 15, 1916. Report on the slit camera and how images are changed by using a slit instead of a pinhole. <http://idea.uwosh.edu/nick/SciAm.pdf>
- [FB05] FIALA M., BASU A.: Panoramic stereo reconstruction using non-SVP optics. *Computer Vision and Image Understanding* 98, 3 (2005), 363–397.
- [GGC97] GU X., GORTLER S.J., COHEN M.F.: Polyhedral geometry and the two-plane parameterization. In *Proc. Eurographics Rendering Workshop* (1997), 1–12.

- [GGSC96] GORTLER S.J., GRZESZCZUK R., SZELISKI R., COHEN M.F.: The Lumigraph. In *Proc. SIGGRAPH* (1996), 43–54.
- [GH97] GUPTA R., HARTLEY R.I.: Linear Pushbroom Cameras. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 19, 9 (1997), 963–975.
- [Gla00] GLASSNER A.: Cubism and cameras: Free-form optics for computer graphics. Technical Report MSR-TR-2000-05, Microsoft Research, 2000.
- [GN02] GLUCKMAN J.M., NAYAR S.K.: Rectified Catadioptric Stereo Sensors. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 24, 2 (2002), 224–236.
- [GN05] GROSSBERG M.D., NAYAR S.K.: The Raxel Imaging Model and Ray-Based Calibration. *International Journal of Computer Vision* 61, 2 (2005), 119–137.
- [GTK88] GREMBAN K.D., THORPE C.E., KANADE T.: Geometric Camera Calibration using Systems of Linear Equations. In *Proc. International Conference on Robotics and Automation* (1988), 562–567.
- [GZC\*06] GEORGIEV T., ZHENG K.C., CURLESS B., SALESIN D., NAYAR S.K., INTWALA C.: Spatio-angular resolution tradeoffs in integral photography. In *Proc. Eurographics Symposium on Rendering* (2006), 263–272.
- [HB00] HICKS R.A., BAJCSY R.: Catadioptric Sensors that Approximate Wide-Angle Perspective Projections. In *Proc. IEEE Conference on Computer Vision and Pattern Recognition* (2001), 1545–1551.
- [HCS\*07] HALL P.M., COLLOMOSSE J.P., SONG Y.-Z., SHEN P., LI C.: RTcams: A New Perspective on Non-photorealistic Rendering from Photographs. *IEEE Transactions on Visualization and Computer Graphics* 13, 5 (2007), 966–979.
- [HLON94] HARALICK R.M., LEE C.N., OTTENBERG K., NOLLE M.: Review and analysis of solutions of the three point perspective pose estimation problem. *International Journal of Computer Vision* 13, 3 (1994), 331–356.
- [HS97] HARTLEY R.I., STURM P.: Triangulation. *Computer Vision and Image Understanding* 68, 2 (1997), 146–157.
- [HW98] HANSON A.J., WERNERT E.A.: Image-based rendering with occlusions via cubist images. In *Proc. IEEE Visualization '98* (1998), 327–334.
- [HWSG06] HOU X., WEI L.-Y., SHUM H.-Y., GUO B.: Real-time Multi-perspective Rendering on Graphics Hardware. In *Proc. EUROGRAPHICS Symposium on Rendering* (2006), 93–102.
- [HZ04] HARTLEY R.I., ZISSERMAN A.: *Multiple view geometry in computer vision*. Second Edition. Cambridge University Press, 2004.
- [IKM\*08] IHRKE I., KUTULAKOS K., MAGNOR M., HEIDRICH W., LENSCH H.: State-of-art Report (STAR): Transparent and Reflective Scene Reconstruction. In *Proc. Eurographics* (2008).
- [JKK05] JANG G., KIM S., KWEON I.: Single Camera Catadioptric Stereo System. In *Proc. Workshop on Omnidirectional Vision, Camera Networks and Nonclassical cameras* (2005).
- [Kan00] KANG S.B.: Catadioptric Self-calibration. In *Proc. IEEE Conference on Computer Vision and Pattern Recognition I* (2000), 201–207.
- [KKYK01] KITAMURA Y., KONISHI T., YAMAMOTO S., KISHINO F.: Interactive stereoscopic display for three or more users. In *Proc. SIGGRAPH* (2001), 231–240.
- [KN06] KUTHIRUMMAL S., NAYAR, S.K.: Multiview Radial Catadioptric Imaging for Scene Capture. *ACM Transactions on Graphics* (Proceedings of SIGGRAPH 2006), 916–923.
- [LCWT06] LANMAN D., CRISPELL D., WACHS M., TAUBIN G.: Spherical Catadioptric Array: Construction, Geometry, and Calibration. In *Proc. International Symposium on 3D Data Processing, Visualization and Transmission* (2006).
- [LH96] LEVOY M., HANRAHAN P.: Light Field Rendering. In *Proc. ACM SIGGRAPH* (1996), 31–42.
- [Loc81] LOCHER J.L. (EDITOR): *M.C. Escher: His Life and Complete Graphic Work*. Amsterdam 1981.
- [Lon81] LONGUET-HIGGINS H.C.: A Computer Program for Reconstructing a Scene from Two Projections. *Nature* 293 (1981), 133–135.
- [MB05] MCMILLAN L., BISHOP G.: Plenoptic Modeling: An Image-Based Rendering System. *Computer Graphics* 29 (1995), 39–46.
- [MPS05] MEI C., POPESCU V., SACKS E.: The occlusion camera. *Computer Graphics Forum* 24, 3 (2005), 335–342.
- [MSEY05] MOUADDIB E., SAGAWA R., ECHIGO T., YAGI Y.: Stereo Vision with a Single Camera and Multiple Mirrors. In *Proc. IEEE International Conference on Robotics and Automation* (2006), 812–817.
- [Nay97] NAYAR S.K.: Catadioptric Omnidirectional Cameras. In *Proc. IEEE Conference on Computer Vision and Pattern Recognition* (1997), 482–488.
- [New64] NEWHALL B.: *The History of Photography, from 1839 to the Present Day*. The Museum of Modern Art (1964) 162.
- [Nis04a] NISTÉR D.: A Minimal Solution to the Generalized 3-Point Pose Problem. In *Proc. IEEE Conference on Computer Vision and Pattern Recognition I* (2004), 560–567.
- [Nis04b] NISTÉR D.: An Efficient Solution to the Five-Point Relative Pose Problem. *IEEE Transactions on Pat-*

- tern Analysis and Machine Intelligence 26, 6 (2004), 756–777.
- [NLB\*05] NG R., LEVOY M., BREDIF M., DUVAL G., HOROWITZ M., HANRAHAN P.: Light field photography with a hand-held plenoptic camera. Technical Report, Stanford University, 2005.
- [Paj02a] PAJDLA T.: Stereo with Oblique Cameras. *International Journal of Computer Vision* 47, 1/2/3 (2002), 161–170.
- [Paj02b] PAJDLA T.: Geometry of Two-Slit Camera. Research Report CTU–CMP–2002–02, Czech Technical University, Prague, 2002.
- [PBP01] PELEG S., BEN-EZRA M., PRITCH Y.: Omnistereo: Panoramic Stereo Imaging. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 23, 3 (2001), 279–290.
- [Ple03] PLESS R.: Using Many Cameras as One. In *Proc. IEEE Conference on Computer Vision and Pattern Recognition II* (2003), 587–593.
- [POV-Ray] POV-Ray: The Persistence of Vision Ray-tracer. <http://www.povray.org/>
- [RB98] RADEMACHER P., BISHOP G.: Multiple-Center-of-Projection Images. *Computer Graphics* 32 (1998), 199–206.
- [RGL04] ROMAN A., GARG G., LEVOY M.: Interactive Design of Multi-Perspective Images for Visualizing Urban Landscapes. In *Proc. IEEE Visualization* (2004).
- [RL06] ROMAN A., LENSCH H.P.A.: Automatic Multiperspective Images. In *Proc. Eurographics Symposium on Rendering* (2006).
- [RLS06] RAMALINGAM S., LODHA S., STURM P.: A Generic Structure-from-Motion Framework. *Computer Vision and Image Understanding* 103, 3 (2006), 218–228.
- [RM84] RUCKER R., MIFFLIN H.: *The fourth dimension: toward a geometry of higher reality* (1984), Houghton Mifflin.
- [RTM\*06] RASKAR R., TUMBLIN J., MOHAN A., AGRAWAL A., LI Y.: State-of-art Report (STAR): Computational Photography. In *Proc. Eurographics* (2006).
- [SDM04] STÜRZL W., DAHMEN H.J., MALLOT H.: The Quality of Catadioptric Imaging—Application to Omnidirectional Stereo. In *Proc. European Conference on Computer Vision* (2004), 614–627.
- [Sei01] SEITZ S.M.: The Space of All Stereo Images. In *Proc. International Conference on Computer Vision I* (2001), 26–33.
- [SGN01] SWAMINATHAN R., GROSSBERG M.D., NAYAR S.K.: Caustics of Catadioptric Cameras. In *Proc. International Conference on Computer Vision II* (2001), 2–9.
- [SGN03] SWAMINATHAN R., GROSSBERG M.D., NAYAR S.K.: A Perspective on Distortions. In *Proc. IEEE Conference on Computer Vision and Pattern Recognition* (2003).
- [SKS99] SHUM, H.Y., KALAI A., AND SEITZ S.M.: Omnivergent stereo. In *Proc. International Conference on Computer Vision* (1999) 22–29.
- [SNG04] SWAMINATHAN R., NAYAR S.K., GROSSBERG M.D.: Designing Mirrors for Catadioptric Systems that Minimize Image Errors. In *Proc. Workshop on Omnidirectional Vision, Camera Networks and Non-Classical Cameras* (2004).
- [SR03] STURM P., RAMALINGAM S.: A generic calibration concept – theory and algorithms. Research Report 5058, INRIA, 2003.
- [SR04] STURM P., RAMALINGAM S.: A generic concept for camera calibration. In *Proc. European Conference on Computer Vision* (2004), 1–13.
- [SSP04] SIMON A., SMITH R.C., PAWLICKI R.R.: Omnistereo for panoramic virtual environment display systems. In *Proc. VR* (2004), 67–74.
- [Stu02] STURM P.: Mixing Catadioptric and Perspective Cameras. In *Proc. Workshop on Omnidirectional Vision* (2002).
- [Stu05] STURM P.: Multi-view Geometry for General Camera Models. In *Proc. IEEE Conference on Computer Vision and Pattern Recognition* (2005), 206–212.
- [TJ95] THOMAS F., JOHNSTON O.: *Disney Animation: The Illusion Of Life*. Los Angeles: Disney Editions. (1981, rev. 1995).
- [TS05] TARDIF J.-P., STURM P.: Calibration of Cameras with Radially Symmetric Distortion. In *Proc. Workshop on Omnidirectional Vision, Camera Networks and Non-Classical Cameras* (2005), 44–51.
- [UWH\*03] UNGER J., WENGER A., HAWKINS T., GARDNER A., DEBEVEC P.: Capturing and Rendering with Incident Light Fields. In *Proc. EGSR* (2003), 141–149.
- [VRA\*07] VEERARAGHAVAN A., RASKAR R., AGRAWAL A., MOHAN A., TUMBLIN J.: Dappled Photography: Mask Enhanced Cameras for Heterodyned Light Fields and Coded Aperture Refocusing. In *Proc. ACM SIGGRAPH* (2007).
- [WFH\*97] WOOD D., FINKELSTEIN A., HUGHES J., THAYER C., SALESIN D.: Multiperspective Panoramas for Cel Animation. In *Proc. ACM SIGGRAPH* (1997), 243–250.
- [WJV\*05] WILBURN B., JOSHI N., VAISH V., TALVALA E., ANTUNEZ E., BARTH A., ADAMS A., HOROWITZ M., LEVOY M.: High Performance Imaging Using Large Camera Arrays. *ACM Transactions on Graphics* (Proc. SIGGRAPH 2005).

- [Wym05] WYMAN C.: Interactive image-space refraction of nearby geometry. In *Proc. GRAPHITE* (2005).
- [YA06] YI S., AHUJA N.: An Omnidirectional Stereo System Using a Single Camera. In *Proc. International Conference on Pattern Recognition* (2006).
- [YKT94] YAGI Y., KAWATO S., TSUJI S.: Real-time Omnidirectional Image Sensor (copis) for Vision-Guided Navigation. *Robotics and Automation* 10, 1 (1994), 11–22.
- [YLY07] YU X., LI F., YU J.: Image-space Caustics and Curvatures. In *Proc. Pacific Graphics* (2007), 181–188.
- [YM04a] YU J., MCMILLAN L.: General Linear Cameras. In *Proc. European Conference on Computer Vision II* (2004), 14–27.
- [YM04b] YU J., MCMILLAN L.: A Framework for Multiperspective Rendering. In *Proc. Rendering Techniques, Eurographics Symposium on Rendering* (2004).
- [YM05a] YU J., MCMILLAN L.: Modelling Reflections via Multiperspective Imaging. In *Proc. IEEE Conference on Computer Vision and Pattern Recognition* (2005), 117–124.
- [YM05b] YU J., MCMILLAN L.: Multiperspective Projection and Collineation. In *Proc. International Conference on Computer Vision* (2005), 580–587.
- [ZB95] ZORIN D., BARR A.H.: Correction of Geometric Perceptual Distortions in Pictures. *Computer Graphics* 29 (1995), 257–264.
- [ZFPW03] ZOMET A., FELDMAN D., PELEG S., WEINSHALL D.: Mosaicing New Views: The Crossed-Slits Projection. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 25, 6 (2003), 741–754.
- [ZN06] ZOMET A., NAYAR S.K.: Lensless Imaging with a Controllable Aperture. In *Proc. IEEE Conference on Computer Vision and Pattern Recognition* (2006).

# Multiperspective Modeling, Rendering, and Imaging

Jingyi Yu


University of Delaware




## Classic Pinhole Camera Model

### Workhorse of Computer Vision and Computer Graphics

$$\hat{p} = \hat{o} + \lambda \begin{bmatrix} u_x & v_x & w_x \\ u_y & v_y & w_y \\ u_z & v_z & w_z \end{bmatrix} \begin{bmatrix} i \\ j \\ 1 \end{bmatrix}$$

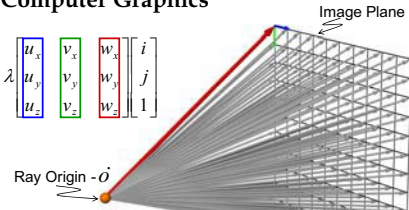



## Conventional Camera

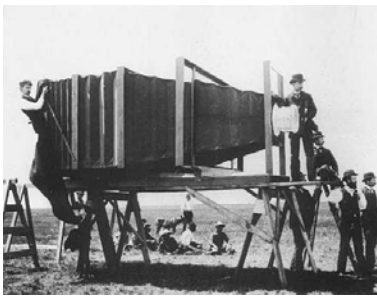

## Multiperspective Cameras

### Pushbroom and Cross-slits

- [Zheng & Tsuji '92], [Gupta & Hartley '94, '97]
- [Seitz '02], [Pajdla '02], [Zomet et al '03]



## Multiperspective Images



[Cubism]



[M.C. Escher]



[Rademacher & Bishop '98]

- Images that depict more than can be seen from any single viewpoint, yet remain interpretable



## Multiperspective Panoramas



Disney's 1940 film *Pinocchio*  
Applications: cel-animation



## What is this STAR about?

- Multiperspective Cameras
- Multiperspective Rendering
- Multiperspective Stereo
- Multiperspective Imaging
- Conclusions and Future Work

Combines Graphics, Vision, and Computational Photography




## Outline


- **Multiperspective Cameras**
  - Classical multiperspective cameras
  - General Linear Cameras
  - Arbitrary multiperspective cameras
- Multiperspective Rendering
- Multiperspective Stereo
- Multiperspective Imaging
- Conclusions and Future Work




## Linear Pushbroom Cameras



[Gupta & Hartley '94, '97]



## Cross-slit Camera



[Zomet, Feldman, Peleg, & Weinshall '03]



## Multiperspective Cameras in a Nutshell

- **A Camera Collects Rays**
  - 2D manifold of ray (one ray per pixel)
  - What is the structure of rays? (Pinhole, Orthographic, Epipolar-Plane Images (EPIs))
- **How to represent rays?**
  - 2 points? 1 point and 1 direction?
  - Light field parameterization (4D)
- **What is the simplest 2D ray manifold?**
  - 2D linear subspaces of rays



## General Linear Cameras (GLC) [Yu & McMillan '04]

- Affine combinations of 3 rays

$$\vec{r} = \alpha \vec{r}_1 + \beta \vec{r}_2 + (1 - \alpha - \beta) \vec{r}_3$$


- Parameterized over 2 parallel planes (2PP)

- Each ray maps to a 4D point  $[s, t, u, v]^T$

Relative 2PP


$$\vec{r} = [\sigma, \tau, u, v]^T$$

$$\sigma = s - u, \tau = t - v$$



## GLCs are "Planes" in 4D

- General Images are 2D manifolds in a 4D "Ray Space"
- Which manifolds correspond to particular image types? (pinhole images, orthographic images, and other multi-perspective types)
- Focus on "flat" planar manifolds
- General Linear Cameras:
  - 3 points determine a plane
  - 3 rays determine a GLC



## [Gu, Gortler, & Cohen '97] Result

- Analyzed geometric structure of 4D ray space under 2PP
  - Rays through a point (pinhole images) are planes
  - Rays passing through a slit parallel to 2PP are also planes
  - Pinholes, pushbroom, and cross-slits are all GLCs
- We set out to find the "slits" for all planes, but instead found new cameras...



## Standard Models are GLCs

<p><b>Pinhole</b> (3 rays thru a point)</p>	<p><b>Orthographic</b> (3 parallel rays)</p>
<p><b>Pushbroom</b> (2 rays thru a point with 3rd ray parallel)</p>	<p><b>Cross-Slit</b> (2 rays thru a point with 3rd intersecting)</p>
<p><b>EPI</b> (3 coplanar rays)</p>	<p><b>Are there any other GLCs?</b></p>



## New GLC Camera Models

<p><b>Pencil</b> (Coplanar rays lie on planes of a pencil thru a line)</p>	
<p><b>Twisted Orthographic</b> (all parallel rays lie in distinct planes)</p>	<p><b>Bilinear</b> (no 2 rays intersect nor are any 2 rays parallel, specific case of Padjla's Oblique camera)</p>




## Example GLC Images

<b>Pinhole</b>	<b>Orthographic</b>	<b>EPI</b>
<b>Pushbroom</b>	<b>Pencil</b>	<b>Twisted Orthographic</b>
<b>Bilinear</b>	<b>Cross-Slit</b>	



## Key Insight


- Lemma - If the *all* rays of a GLC intersect *some* finite line, then that line *must* be parallel to the parameterization planes (excluding the degenerate cases of EPI and pinhole cameras)
- Thus, the slits of a cross-slit camera are fundamental constructs of GLCs
- For a particular Cross-Slit the choice of parameterization planes is fixed





## Finding the Cross-Slits

- Slits can be found by sweeping planes
- Slits occur when the triangle formed by the 3 ray intersections with the swept plane has zero area



$$\det \begin{bmatrix} u_1 + \lambda\sigma_1 & v_1 + \lambda\tau_1 & 1 \\ u_2 + \lambda\sigma_2 & v_2 + \lambda\tau_2 & 1 \\ u_3 + \lambda\sigma_3 & v_3 + \lambda\tau_3 & 1 \end{bmatrix} = 0$$

$$A \cdot \lambda^2 + B \cdot \lambda + C = 0$$

First Characteristic Equation



## Modeling More Complex Multiperspective Cameras




- Catadioptric Mirrors [Oren & Nayar '96]
- Analyzed as
  - loci of pinhole cameras [Swaminathan & Nayar '03]
  - as a special class of multiperspective cameras [Yu & McMillan '05]



## Everyday Multiperspective Camera

- Reflection Analysis via Multiperspective Imaging [Yu & McMillan CVPR 05]

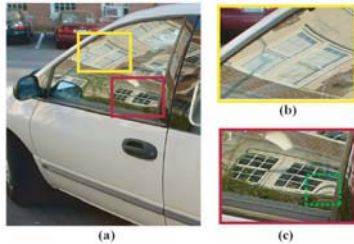


- What caused reflection distortions?
- How many types of distortions are there?
- What types of GLCs do they correspond to?



## Multiperspective Ray Manifold

- Rays reflected from a surface lie on a 2D (non-linear) manifold in 4D ray space
- This manifold can be approximated by tangent planes (GLCs)
- Guideline for designing special mirrors



$$\Sigma(x, y) = [\sigma(x, y), \tau(x, y), u(x, y), v(x, y)]$$



## Tangent Plane as GLC

- The reflection manifold is in form:
 
$$\Sigma(x, y) = [\sigma(x, y), \tau(x, y), u(x, y), v(x, y)]$$
- General reflections are 4D manifolds
  - Recast the characteristic equation in terms of surface's local tangent space
- The first characteristic equation can be computed as:





$$\begin{vmatrix} u + \lambda\sigma & v + \lambda\tau & 1 \\ (u + u_x) + \lambda(\sigma + \sigma_x) & (v + v_x) + \lambda(\tau + \tau_x) & 1 \\ (u + u_y) + \lambda(\sigma + \sigma_y) & (v + v_y) + \lambda(\tau + \tau_y) & 1 \end{vmatrix} = 0$$



## GLC Matrix Representation

- An intuitive reformulation of GLCs in terms of eigenvectors [Adams and Levoy '07]
- Image(x, y) = L(x, y, P(x, y))
  - P determines perspective
  - P is a 2x2 matrix
  - Eigenvalues of P determine the GLC type
- GLCs with Finite Aperture



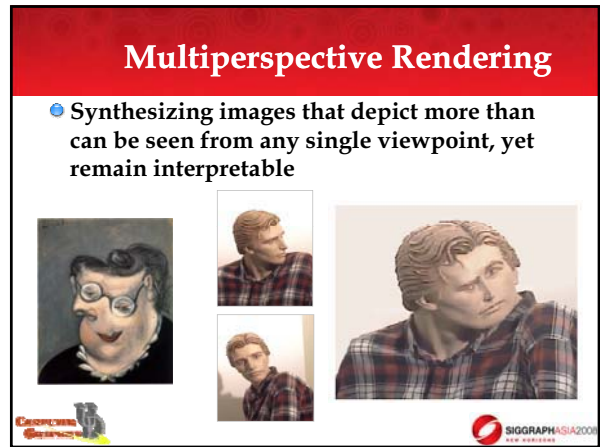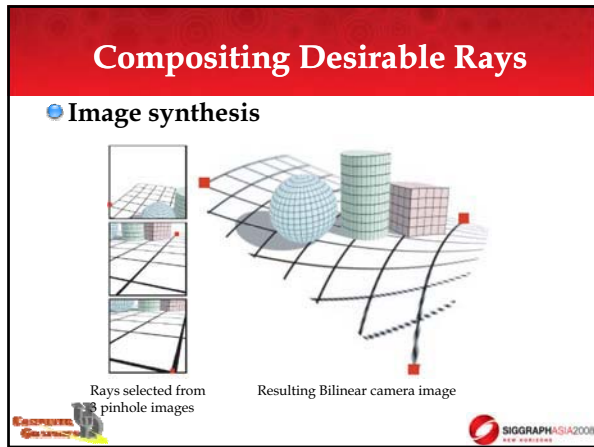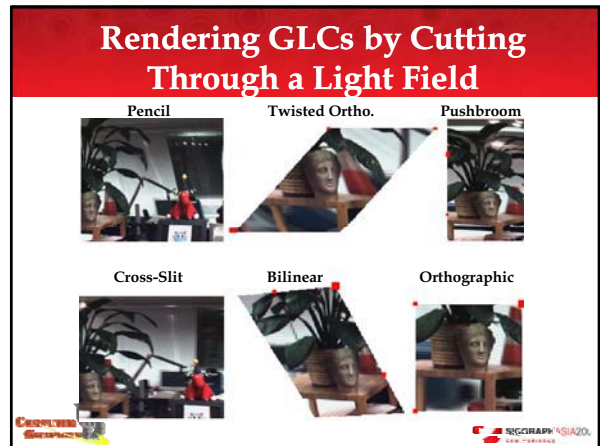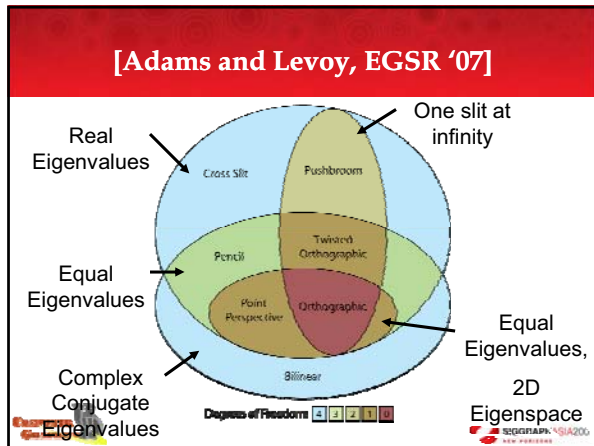

- ### Outline
- Multiperspective Cameras
  - Multiperspective Rendering
    - Methodologies
    - Multiperspective Distortion
    - Correcting Distortions
  - Multiperspective Stereo
  - Multiperspective Imaging
  - Conclusions and Future Work

- ### Multiperspective Rendering Frameworks
- What sort of framework?
    - 3D-based vs. Image-based
  - Mathematical
    - Concise definitions
    - Rules & Geometric Structure
    - Provable properties
  - Computational
    - Algorithms for rendering
    - User interfaces for specifying
    - Techniques for sampling
-

## Column Stitching



Courtesy of Steve Seitz



## Construction by a Strip Camera



Piecing together different GLCs

Román et al. '04



Photomontage

Agarwala et al. '06




## GLC-based Approaches

- GLCs describe all “planar” manifolds in Ray space, how about an even more general multiperspective camera model?
- Old trick! Approximate arbitrary smooth manifolds using piecewise planar patches
  - In 3D this gives polygonal models
  - In 4D ray space this gives 1<sup>st</sup> order approximations to arbitrary multiperspective cameras
- Multiperspective rendering is equivalent to tiling the image plane with GLCs!



## Tiling Image Space with GLCs

- Triangulate the image plane
- Place a generator ray at each vertex
- Render or texture map each GLC image



## GLC Adjacency Constraints


- Not every GLC can be adjacent to another

GLC Type	P	O	PB	X	PN	T	B
Pinhole (P)	No	No	Yes	Yes	Yes	No	No
Orthographic (O)	No	No	Yes	Yes	No	Yes	No
Pushbroom (PB)	Yes	Yes	Yes	Yes	Yes	Yes	Yes
XSlit (X)	Yes	No	Yes	Yes	Yes	Yes	Yes
Pencil (PN)	Yes	No	Yes	Yes	Yes	Yes	Yes
Twisted Orth. (T)	No	Yes	Yes	Yes	Yes	Yes	Yes
Bilinear (B)	No	No	Yes	Yes	Yes	Yes	Yes



## A More Practical Specification

- Specifying an “image-plane” mesh along with what is “seen” at every vertex, is not a very natural way of specifying a multiperspective image
- No intuition for
  - Specifying the mesh
  - Selecting the generator rays
  - Sampling the rays




## Interactive Design

- Predefined an image plane triangulation
- Explore GLCs to find interesting image elements
- Cut out GLC fragments and arrange them onto the triangulated image plane
- Can apply any image transform that preserves affine combinations
- Blend the rays of GLCs in overlap regions
- Render each GLC



SIGGRAPH ASIA 2008  
NEW PAPER

## Video of Design Process

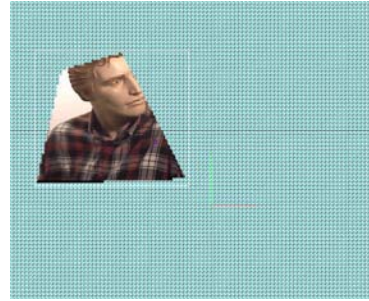

SIGGRAPH ASIA 2008  
NEW PAPER


## Cubism-style Rendering



SIGGRAPH ASIA 2008  
NEW PAPER

## Multiperspective Panoramas


- Multiperspective Panoramas

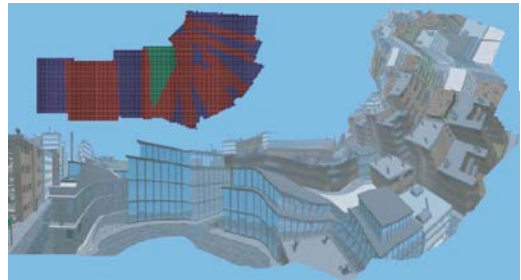

SIGGRAPH ASIA 2008  
NEW PAPER

## Multiperspective Distortions

- Classification
  - Perspective: caused by sampling
  - Projective: caused by projection model
- Typical multiperspective distortions
  - Vanishing points? Singularities?
  - Curving of lines
  - Aspect ratio



SIGGRAPH ASIA 2008  
NEW PAPER

## Caustic Distortions


- For cross-slit type cameras
- Local rays "focus" at two slits
  - The distance between the slits determines the aspect ratio distortion.
  - The orientation of the slits determines the orientation of the distortion.
  - When the slits lie infinitely faraway, local GLC maps to a pushbroom camera, causing feature duplication.




SIGGRAPH ASIA 2008  
NEW PAPER

## Hyperbolic Mirror


Reflection off the mirror




Green: the mirror.  
Blue: loci of the slits, also called caustics.



Ruling: determine the orientation of the distortion




Slit Distance: determine aspect ratio of the distortion




SIGGRAPH ASIA 2008

## Parabolic Mirror


Reflection off the mirror




Green: the mirror.  
Blue: loci of the slits, also called caustics.



Ruling: determine the orientation of the distortion




Slit Distance: determine aspect ratio of the distortion




SIGGRAPH ASIA 2008

## Cylindrical Mirror


Reflection off the mirror




Green: the mirror.  
Blue: loci of the slits, also called caustics.



Ruling: determine the orientation of the distortion



Slit Distance: determine aspect ratio of the distortion



SIGGRAPH ASIA 2008


## Correcting Distortions: Using Geometry Proxy

- [Swaminathan & Nayar '03]
- Similar to many classical image-based rendering techniques, e.g., lumigraph
- Approximate scene geometry using simple primitives: planes, spheres, cones, etc...
- Find the proper warping function

SIGGRAPH ASIA 2008

## GLC Collineation [Yu & McMillan '05]

- GLCs define the set of rays, not how they are sampled.
- Specific sampling causes projective distortions
- GLC collineation between two image planes
- Can adjust sampling with a sampling plane

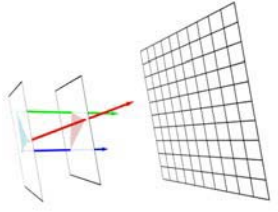

SIGGRAPH ASIA 2008

## Interactive Distortion Correction



SIGGRAPH ASIA 2008

# Correct Projective Distortions


## Faux IBR Animation



# Outline

- Multiperspective Cameras
- Multiperspective Rendering
- **Multiperspective Stereo**
  - Stereo Constraint
  - Multiperspective Stereo Pairs
  - Beyond Multiperspective Stereo
- Multiperspective Imaging
- Conclusions and Future Work

# Stereo Imaging

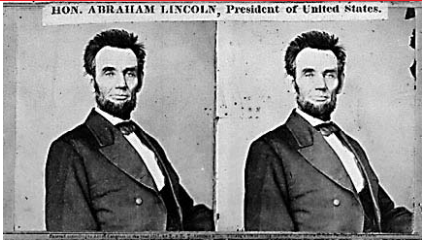

**Key property: horizontal parallax**

- Enables stereoscopic viewing and stereo algorithms
- **What other image varieties have this property?**



Courtesy of Steve Seitz

# Stereo Panoramas



- [Ishiguro, Yamamoto, Tsuji, 92]
  - [Peleg and Ben-Ezra, 99]
  - [Shum, Kalai, Seitz, 99]
  - [Nayar and Karmarkar, 00]
- Courtesy of Steve Seitz

# Epipolar Geometry

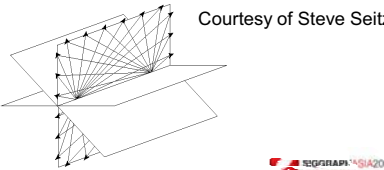


Courtesy of Steve Seitz

# Geometry of Stereo Panoramas




Courtesy of Steve Seitz




## Geometry of Stereo Panoramas



Courtesy of Steve Seitz



## Epipolar Geometry



Courtesy of Steve Seitz




## Stereo Classification Theorem


Two images form a stereo pair iff

- Each row lies on a doubly ruled surface
- Corresponding rows are the same surface


There are only 3 doubly-ruled surfaces



hyperboloid



hyperbolic paraboloid




plane

Courtesy of Steve Seitz





## Pushbroom Stereo



Courtesy of Steve Seitz



## Stereo Cyclographs



input




cyclographs

Courtesy of Steve Seitz



Courtesy of Steve Seitz




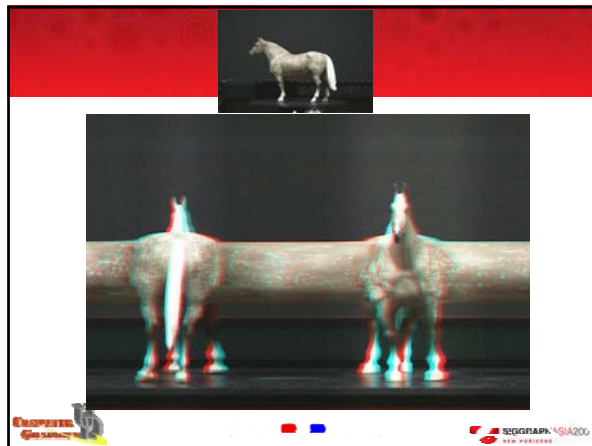

### A More General Stereo Model (or Close-to-Stereo Model)


- What if two multiperspective images do not satisfy the Seitz condition?
- A new notion: Epsilon Stereo Pair [Ding & Yu '07]

### Tools to Find the Optical $\epsilon$ -Pair: GLC Collineation

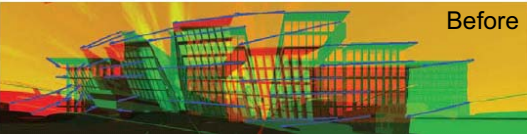

Before

Pinhole (green) + cross-slit (yellow)

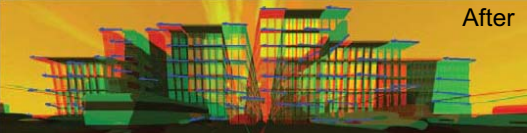

After

### Outline


- Multiperspective Cameras
- Multiperspective Rendering
- Multiperspective Stereo
- **Multiperspective Imaging**
  - Catadioptric Mirrors
  - Radial Imaging System
- Conclusions and Future Work

### Multiperspective Imaging

- Everyday multiperspective images




### Catadioptric Mirrors

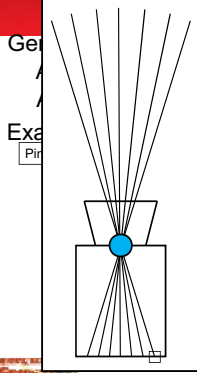

General Model:  
"along" one viewing ray  
set of pixels, with the associated rays



## Catadioptric Mirrors

mirror (hyperboloid)

viewing ray  
with the associated rays

REGGRAPH@SIA201  
NEW PARISS

## Catadioptric Mirrors

General Camera Model:  
A pixel "watches along" one viewing ray  
A camera is a set of pixels + the associated rays

Examples:

- Pinhole
- Central catadioptric

viewing ray  
with the associated rays

REGGRAPH@SIA201  
NEW PARISS

## Catadioptric Mirrors

General Camera Model:  
A pixel "watches along" one viewing ray  
A camera is a set of pixels.

Examples:

- Pinhole
- Central catadioptric
- Non-central catadioptric

REGGRAPH@SIA201  
NEW PARISS

## Catadioptric Mirrors

General Camera Model:  
A pixel "watches along" one viewing ray  
A camera is a set of pixels + the associated rays

Examples:

- Pinhole
- Multi-stereo
- Non-central mosaic
- Central catadioptric
- Non-central catadioptric

Etc.: e.g. pinhole with radial or any other distortion

REGGRAPH@SIA201  
NEW PARISS

## 3D Reconstruction Example

REGGRAPH@SIA201  
NEW PARISS

## Calibration on/using General Camera Model

- General camera model + calibration [Grossberg-Nayar]
- Caustics + calibration [Swaminathan-Grossberg-Nayar]
- Motion estimation [Pless, Neumann-Fermüller-Aloimonos]
- Camera design [Neumann-Fermüller-Aloimonos]
- Stereo geometry [Pajdla, Seitz]
- Non-central catadioptric cameras [Aliaga, Micusik-Pajdla]
- Epipolar geometry [Wexler-Fitzgibbon-Zisserman]

REGGRAPH@SIA201  
NEW PARISS

## Calibration Method

## Calibration Method

Summary:

- (1) Take images of object in different poses
- (2) 2D-3D matching (pixels to points on object)
- (3) Estimation of tensors
- (4) Extraction of motion parameters from tensors
- (5) Computation of projection rays
- (6) Bundle adjustment

## Multiview Radial Catadioptric Imaging

Camera's Viewpoint

Courtesy of Shree Nayar

## Multiview Radial Catadioptric Imaging

Virtual Viewpoint 1

Camera's Viewpoint

Virtual Viewpoint 2

Courtesy of Shree Nayar

## Multiview Radial Catadioptric Imaging

Virtual Viewpoint 1

Camera's Viewpoint

Virtual Viewpoint 2


Courtesy of Shree Nayar

## Multiview Radial Catadioptric Imaging [Kuthirummal & Nayar '06]

Circular Viewpoint Locus

Courtesy of Shree Nayar

## Applications: 3D Reconstruction

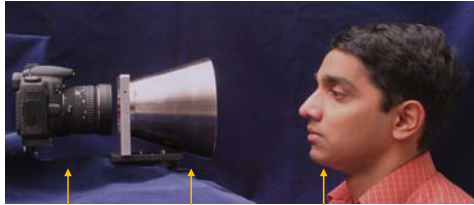

Camera Mirror Subject

Courtesy of Shree Nayar



## Capturing 3D Texture



Bark

Bread



## Conclusions

- **Multiperspective Cameras**
  - Classical multiperspective cameras
  - General Linear Cameras
  - Arbitrary multiperspective cameras
- **Multiperspective Rendering**
- **Multiperspective Stereo**
- **Multiperspective Imaging**
- **Conclusions and Future Work**



## Outline

- **Multiperspective Cameras**
- **Multiperspective Rendering**
  - Methodologies
  - Multiperspective Distortion
  - Correcting Distortions
- **Multiperspective Stereo**
- **Multiperspective Imaging**
- **Conclusions and Future Work**



## Outline

- **Multiperspective Cameras**
- **Multiperspective Rendering**
- **Multiperspective Stereo**
  - Stereo Constraint
  - Multiperspective Stereo Pairs
  - Beyond Multiperspective Stereo
- **Multiperspective Imaging**
- **Conclusions and Future Work**



## Outline

- **Multiperspective Cameras**
- **Multiperspective Rendering**
- **Multiperspective Stereo**
- **Multiperspective Imaging**
  - Catadioptric Mirrors
  - Radial Imaging System
- **Conclusions and Future Work**



## Future Work: Multiperspective Rendering Hardware

- Currently either ray-traced or synthesized from light fields/videos
- Use graphics hardware for interactive rendering
  - Interactive Panoramas
  - Image-based animations
  - Real-time accurate reflections/refractions
- Two possible approaches
  - Subdivision + linear rasterization
  - Non-linear rasterization



## Multiperspective Acquisition

- More efficient light field sampling
  - Classical LF are pinhole-oriented
  - GLC oriented LF sampling
  - GLC oriented LF rendering
- Mirror-based light field/BRDF sampling
  - Specially designed mirror shape to avoid distortions
  - Balance st-uv sampling density
- Multiperspective Light Sources
  - Non-perspective shadows
  - New shape-from-shadow algorithms



## Differential Ray Geometry

- Algebraic ray subspaces
  - GLCs are 2D linear subspaces
  - Characterize shading and distortions
  - Ray space triangulation for more flexible light field sampling
- Derive surface differential geometry
  - Curvature-from-ray-geometry [Ding & Yu '08]
  - New Shape-from-distortion approaches



## Questions?

Thanks for your attention

